

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 April 2002 (04.04.2002)

PCT

(10) International Publication Number
WO 02/26934 A2

- (51) International Patent Classification⁷: C12N (74) Agent: ABELEV, Gary; Baker Botts LLP, 30 Rockefeller Plaza, New York, 10112-0228 (US).
- (21) International Application Number: PCT/US01/30426
- (22) International Filing Date:
28 September 2001 (28.09.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/236,296 28 September 2000 (28.09.2000) US
60/293,254 24 May 2001 (24.05.2001) US
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): NEW YORK UNIVERSITY [US/US]; 70 Washington Square South, New York, NY 10012-1091 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): ANTONIOTTI, Marco [IT/US]; 298 2nd Street, Apt. 1L, Jersey City, NJ 07302 (US). MISHRA, Bhubaneswar [IN/US]; 16 Dunster Road, Great Neck, NY 11021 (US). ANANTHARAMAN, Thomas [IN/US]; 6559 Portage Road, Deforest, WI 53532 (US). PAXIA, Salvatore [IT/US]; 300 West 55th Street, Apt. 16J, New York, NY 10019 (US).
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND PROCESS FOR VALIDATING, ALIGNING AND REORDERING ONE OR MORE GENETIC SEQUENCE MAPS USING AT LEAST ONE ORDERED RESTRICTION MAP

(57) Abstract: A method and system are provided for comparing ordered segments of a first DNA restriction map to determine a level of accuracy the first DNA map and/or the second DNA map. In particular, the first and second DNA maps can be received (the first DNA map corresponding to a sequence DNA map, and the second DNA map corresponding to a genomic consensus DNA map as provided in an optical DNA map). Then, the accuracy of the first DNA map and/or the second DNA map is validated based on information associated with the first and second DNA maps. In addition, a method and system are provided for aligning a plurality of DNA sequences with a ordered DNA restriction map. The DNA sequences and the DNA map are received (the DNA sequences being fragments of a genome and the DNA map corresponding to a genomic consensus DNA map which relates to an optical ordered DNA map). Then, a level of accuracy of the DNA sequences and the DNA map is obtained based on information associated with the DNA sequences and the DNA map by means of the method and system described above. The locations of the DNA map at which the DNA sequences are capable of being associated with particular segments of the DNA map are located. Furthermore, it is possible to obtain locations of the DNA map (without the validation) by locating an optimal one of the locations for each of the DNA sequences for each of the locations.

WO 02/26934 A2

**SYSTEM AND PROCESS FOR VALIDATING,
ALIGNING AND REORDERING ONE OR MORE GENETIC SEQUENCE
MAPS USING AT LEAST ONE ORDERED RESTRICTION MAP**

5 Field of the Invention

The present invention relates to a system and process for a sequence validation based on at least one ordered restriction map, and more particularly to validating, aligning and/or reordering one or more genetic sequence maps (e.g., ordered restriction enzyme DNA maps) using such ordered restriction map via map matching and comparison.

10

Background Information

The sequence of nucleotide bases present in strands of nucleotides, such as DNA and RNA, carries the genetic information encoding proteins and RNAs. The ability to accurately determine a nucleotide sequence is crucial to many areas in molecular biology. For example, the study of genetics relies on complete nucleotide sequences of the organism. Many efforts have been made to generate complete nucleotide sequences for various organisms, including humans, mice, worms, flies and microbes.

15

There are a variety of well-known methods to sequence nucleotides, including the Sanger dideoxy chain termination sequencing technique and the Maxam-Gilbert chemical sequencing technique. However, the current technology limits the length of a nucleotide sequence that may be sequenced. Techniques have been developed to sequence larger nucleotide sequences. In general, these methods involve fragmenting the large sequence into fragments, cloning the fragments, and sequencing the cloned fragments. The sequences can be fragmented through the use of restriction enzymes or mechanical shearing. Cloning techniques include the use of cloning vectors such as cosmids, bacteriophage, and yeast or bacterial artificial chromosomes (YAC or BAC). The nucleotide sequence of the fragments can then be compared, overlapping regions identified, and the sequences assembled to form "contigs," which are sets of overlapping clones. By assembling the overlapping clones, it is possible to determine

20

25

30

-2-

the sequence of nucleotide bases of the full length sequence. These methods are well known to those having ordinary skill in the art.

The accuracy of nucleotide sequence data is limited by numerous factors. For example, there may be missing sections due to incomplete representation of the genomic DNA. There may also be spurious DNA sequences intermixed with the desired genomic DNA. Common sources of contamination are vector-derived DNA and host cell DNA. Also, the accuracy of the identification of bases tends to degrade toward the end of long sequence reads. Additionally, repeated sequences can create errors in the re-assembly and/or the mismatching of contigs.

10 In order to reduce the sequence data errors, sequencing of the fragments is generally performed multiple times. To help reduce errors such as mismatching or misassembly resulting from repeated sequences, the "hierarchical shotgun sequencing" approach (also referred to as "map-based," "BAC-based" or "clone by clone") can be used. This approach involves generating and organizing a set of large insert clones covering the genome and separately performing shotgun sequencing on appropriately selected clones. Because the sequence information is local, the issue of long-range misassembly is eliminated and the risk of short-range misassembly is reduced.

Other known sequencing and characterization techniques involve generating restriction fragment fingerprints to determine whether close overlaps are present, thereby assembling the BACs into fingerprint clone contigs. Fingerprint clone contigs can be positioned along the chromosome by anchoring them with sequence-tagged sites (STS) markers from existing genetic and physical maps. These fingerprint clone contigs can be associated with specific STSs by probe hybridization or direct search of the sequenced clones. Clones can also be positioned by fluorescence in situ hybridization. Each of these known techniques are costly and time consuming.

Another approach for characterizing nucleotide sequences involves the use of ordered restriction maps of single molecules. One specific technique used to produce single molecule ordered restriction maps is "Optical Mapping". Optical mapping is a single molecule methodology for the rapid production of ordered restriction maps from individual DNA molecules. Ordered restriction maps are preferably constructed

-3-

using fluorescence microscopy to visualize restriction endonuclease cutting events on individual fluorochrome-stained DNA molecules. Restriction enzyme cleavage sites are visible as gaps that appear flanking the relaxed DNA fragments (pieces of molecules between two consecutive cleavages). Relative fluorescence intensity
5 (measuring the amount of fluorochrome binding to the restriction fragment) or apparent length measurements (along a well-defined "backbone" spanning the restriction fragment) have proven to provide accurate size-estimates of the restriction fragment and have been used to construct the final restriction map.

Such restriction map created from one individual DNA molecule is limited in
10 its accuracy by the resolution of the microscopy, the imaging system (CCD camera, quantization level, etc.), illumination and surface conditions. Furthermore, depending on the digestion rate and the noise inherent to the intensity distribution along the DNA molecule, with some probability, one is likely to miss a small fraction of the restriction sites or introduce spurious sites. Additionally, investigators may
15 sometimes (rather infrequently) lack the exact orientation information (whether the left-most restriction site is the first or the last). Thus, given two arbitrary single molecule restriction maps for the same DNA clone obtained this way, the maps are expected to be roughly the same in the following sense--if the maps are "aligned" by first choosing the orientation and then identifying the restrictions sites that differ by
20 small amount, then most of the restrictions sites will appear roughly at the same place in both the maps.

For instance, in the original method, fluorescently-labeled DNA molecules were elongated in a flow of molten agarose containing restriction endonucleases, generated between a cover-slip and a microscope slide, and the resulting cleavage
25 events were recorded by fluorescence microscopy as time-lapse digitized images. The second generation optical mapping approach, which dispensed with agarose and time-lapsed imaging, involves fixing elongated DNA molecules onto positively-charged glass surfaces, thus improving sizing precision as well as throughput for a wide range of cloning vectors (cosmid, bacteriophage, and yeast or bacterial artificial
30 chromosomes (YAC or BAC)).

A DNA sequence map is an "in silico" order restriction map that is obtained for a nucleotide sequence by simulating a restriction enzyme digestion process. The sequence data is analyzed and restriction sites are identified in a predetermined manner. The resulting sequence map has some piece of identification data plus a
5 vector of fragments, whose elements encode the size in base-pairs.

Sequenced clones can be associated with fingerprint clone contigs in the physical map by using the sequence data to calculate a partial list of restriction fragments in silico and comparing that list with the experimental database of BAC fingerprints. Genomic consensus maps are generated from optical maps using, e.g.,
10 "Gentig" software which is a conventional software that generates optical ordered restriction maps.

It was previously unknown how to determine the accuracy of the DNA sequence maps. Indeed such determination was either impossible or provided a small level of surety. It is one of the objects of the present invention to enable a validation
15 of the DNA ordered sequence maps against the optical maps. Another object of the present invention is to enable an alignment and reordering of the DNA sequence maps based on the optical mapping.

Approaches to aligning or reconstructing restriction maps have been described in E.W. Myers et al., "An $O(N^2 \lg N)$ Restriction Map Comparison and Search
20 Algorithm", Bulletin of Mathematical Biology, 54(4):599-618, 1992; R.M. Karp et al., "Algorithms for Optical Mapping", RECOMB 98, 1998; Parida, L., A Uniform Framework for Ordered Restriction Map Problems, Journal of Computational Biology, Vol 5, No 4, Mary Ann Liebert Inc. Publishers, pp 725-739, 1998; Gusfield, D., Algorithms on Strings, Trees, and Sequences, Cambridge University Press, 1997;
25 and Lee, J.K., Dancik, V., and M.S. Waterman, "Estimation for restriction sites observed by optical mapping using reversible-jump Markov Chain Monte Carlo", J. Comp. Biol., 5, 505-516, 1997. However, none of these publications disclose the novel processes and systems described herein below.

Summary of the Invention

In general, an exemplary embodiment of the system and process for validating and aligning the simulated ordered restriction map against the optical ordered restriction map according to the present invention can be implemented as follows.

5 First, each molecule may be cut in several places using a digestion process by one or more restriction enzymes as is known to those having ordinary skill in the art. Each of these "cut" molecules can represent a partial DNA (optical) ordered restriction map. Then, it is possible to reconstruct a complete Genome Wide (optical) ordered restriction map. Such reconstruction process can be carried out by an iterative process
10 which maximizes the likelihood of a plausible hypothesis given the partial map and the model of the error sources (e.g., a Bayesian-based process).

It should be understood that the inputs to the Validation/Alignment system and process are preferably restriction maps (which include DNA sequences therein) and Genome wide (e.g. optical) ordered restriction maps (which can be represented as
15 variable length vectors of segment/fragment information fields). Each segment information has two pieces of information associated therewith: size and standard deviation. The size may be a measure of the segment, which is proportional to the number of nucleotides present in the segment. The standard deviation preferably represents the error associated with the segment size measurement. Each map has
20 associated therewith, e.g., two measures of how reliable the detection of cuts by the procedure is, i.e., the *false positive* probability and the *digestion* probability. The first measure relates to the event that the cut is detected incorrectly. The second measure relates to the event that the cut actually appears where it is reported.

According to the present invention, the optical and simulated ordered
25 restriction maps are compared to one another to determine whether and to what extent they match. The accuracy of a match is computed by minimizing the error committed by matching one map against the other at a given position. An exemplary mathematical model and procedure underlying this computation is preferably a Bayesian-based procedure/algorithm. The computation is based on a Dynamic
30 Programming Procedure ("DPP"). However, it should be understood that other

procedures and algorithms can be utilized to compare to one another these maps to validate and align at least one such map, according to the present invention.

Using the Bayesian-based exemplary procedure with the system and method of the present invention, hypothesis can be obtained and the probability of a given event (based on the hypothesis) may be formulated. This probability is preferably a
5 mathematical formula, which is then computed using a conventional model of various error sources. An exemplary optimization process which uses such formula may maximize or minimize the formula.

In order to find the extreme value of the overall probability formula over all possible combinations of matches, a conventional DPP can be used on the problem
10 which was defined by the Bayesian-based exemplary procedure as described above. For example, the DPP may preferably compute a set of extreme values for a mathematical formula defined above by extending a partial solution in a predetermined manner while keeping track of a particular number of alternatives. All
15 of the alternatives may be maintained in a table, and thus do not have to be recomputed every time the associated likelihood or score function needs to be evaluated.

Accordingly, a method and system according to the present invention are provided for comparing ordered segments of a first DNA map with ordered segments
20 of a second DNA map to determine a level of accuracy the first DNA map and/or the second DNA map. In particular, the first and second DNA maps can be received (the first DNA map corresponding to a sequence DNA map, and the second DNA map corresponding to a genomic consensus DNA map as provided in an optical DNA map). Then, the accuracy of the first DNA map and/or the second DNA map is
25 validated based on information associated with the first and second DNA maps.

In another embodiment of the present invention, the first DNA map and/or the second DNA map are validated by determining whether one or more matches exist between ordered segments of the first DNA map and the ordered segments of the second DNA map. In addition, a number of the matches which exist between the
30 segments of the first DNA map and the segments of the second DNA map can be obtained.

-7-

In yet another embodiment of the present invention, the first DNA map and/or the second DNA map are validated by determining whether the first DNA map includes one or more cuts which are missing from the second DNA map. Also, a number and locations of the missing cuts based on the first and second DNA maps
5 can be obtained thereafter.

According to a further embodiment of the present invention, the first DNA map and/or the second DNA map are validated by determining whether the second DNA map includes one or more cuts which are absent from the first DNA map. The validation can also be performed by determining whether the first DNA map includes
10 one or more cuts which are missing from the second DNA map, obtaining a first number and locations of the missing cuts based on the first and second DNA maps, determining whether the second DNA map includes one or cuts which are absent from the first DNA map, and obtaining a second number and locations of the absent cuts based on the first and second DNA maps. Furthermore, it is possible to generate an
15 error indication if the number of the matches is less than a match threshold, the first number of the missing cuts is greater than a first predetermined threshold, and/or the second number of the absent cuts is greater than a second predetermined threshold.

In another embodiment of the present invention, the first DNA map is an in-silico ordered restriction map obtained from a DNA sequence, which may include
20 identification data and at least one vector of the segments of the first DNA map. At least one vector of the first segments can encode a size of base-pairs of the DNA sequence. Further, the second DNA map can include identification data and at least one variable-length vector representing its ordered segments.

In still another embodiment of the present invention, the second DNA map is
25 defined as a subsequence of a genome-wide ordered restriction map. Also, the validation is performed by determining the accuracy of at least one of the first DNA map and the second DNA map using the following probability density function:

$$\Pr(D | \hat{H}(\sigma, p_e, p_f))$$

where D is the second DNA map, \hat{H} is the first DNA map, σ is a standard deviation summarizing map-wide standard deviation data, p_c is a probability of a positive cut of a DNA sequence, and p_f is a probability of a false-positive cut of the DNA sequence.

In another embodiment of the present invention, the accuracy can be validated
5 as a function of an orientation of the first DNA map with respect to an orientation of the second DNA map. Also, the validation can be performed by executing a dynamic programming procedure ("DPP") on the first and second DNA maps to generate a first table of partial and complete alignment scores, and first auxiliary tables and first data structures to keep track of number and locations of cuts and segment matches,
10 receiving a third DNA map which is a reverse map of the first DNA map, executing the DPP on the second and third DNA maps to generate a second table of partial and complete alignment scores, and second auxiliary tables and second data structures to keep track of number and locations of the cuts and the segment matches, analyzing a last row of the first table and a last row of the second table to obtain at least one
15 optimum alignment of the first and second DNA maps, and reconstructing an optimum alignment and/or sub-optimal alignments using the first and second auxiliary tables and data structures.

According to still another embodiment of the present invention, the accuracy can be validated by matching an extension of one or more left end segment of the
20 segments of the first DNA map to at least one segment of the second DNA map and/or by matching an extension of one or more right end segment of the segments of the first DNA map to at least one segment of the second DNA map. Furthermore, it is possible to detect an alignment of the first DNA map with respect to the second DNA map, the alignment being indicative of sequence positions of the segments of the first
25 DNA map along the second DNA map.

In addition, other embodiments of the process and system according to the present invention are provided for aligning a plurality of DNA sequences with a DNA map. First, the DNA sequences and the DNA map can be received (the DNA sequences being fragments of a genome and the DNA map corresponding to a
30 genomic consensus DNA map which relates to an ordered restriction - e.g. optical - DNA map). Then, a level of accuracy of the DNA sequences and the DNA map is

validated based on information associated with the DNA sequences and the DNA map. The locations of the DNA map at which the DNA sequences are capable of being associated with particular segments of the DNA map are located. Furthermore, it is possible to obtain locations of the DNA map (without the validation) by locating
5 an optimal one of the locations for each of the DNA sequences for each of the locations.

In another embodiment of the present invention, the locations are determined for each of the DNA sequences, they may be positions on the DNA map at which the corresponding DNA sequences are anchorable, and these locations can define at least
10 one alignment of the DNA sequences with respect to the DNA map. The alignment may include multiple alignments of the DNA sequences with respect to the DNA map, and the multiple alignments may be ranked based on a predetermined criteria to obtain a score set which includes a particular score for each of the multiple alignments. The determination may be performed by providing the DNA sequences in
15 a first order of the multiple alignments with respect to the DNA map and determining a position for each of the DNA sequences, with respect to the DNA map, by selecting the DNA sequences to be in a second order corresponding to the score set.

In still another embodiment of the present invention, the determination of the locations can be performed by restricting each of the DNA sequences to be associated
20 with only one of the locations on the DNA map. Also, such determination may produce a single alignment of the DNA sequences with respect to the DNA map.

In yet another embodiment of the present invention, the determination can be performed by locating an optimal one of the locations for each of the DNA sequences to obtain an alignment solution for each of the locations. Also, the locating of the
25 optimal location may be repeated for each subsequent one of the locations and excluding the alignment solution from a preceding locating procedure. Furthermore, each subsequent locating procedure can be made by relaxing at least one particular constraint to determine the respective locations. The particular constraint preferably includes a first requirement that two of the DNA sequences are prevented from
30 overlapping when associated with the respective locations on the DNA map. The particular constraint can include a second requirement that a maximum number of the

-10-

DNA sequences are associated with the respective locations on the DNA map, and a third requirement that an overall score of the alignment of the DNA sequences with respect to the locations on the DNA map is minimized or maximized. It is also possible to assign respective weights to the second requirement and the third
5 requirement.

Brief Description of the Drawings

For a more complete understanding of the present invention and its advantages, reference is now made to the following description, taken in conjunction
10 with the accompanying drawings, in which:

Figure 1 is a first exemplary embodiment of a system for validating, aligning and/or reordering a genetic sequence using an optical map via map matching and comparison according to the present invention;

Figure 2 is a second exemplary embodiment of a system for validating,
15 aligning and/or reordering a genetic sequence using the optical map;

Figure 3 is an exemplary embodiment of a validation procedure of a process according to the present invention;

Figure 4 is an exemplary embodiment of the process according to the present invention for simulating a restriction digestion of the sequence map, and then
20 validating the accuracy of the consensus optical order restriction map and/or the simulated map;

Figure 5A is a detailed flow chart of an exemplary validation technique utilized in the process shown in Figure 4;

Figure 5B is a detailed illustration of an exemplary flow diagram of particular
25 steps of Figure 5A in which fragments of the optical ordered restriction map are compared to fragment of the simulated ordered restriction map to obtain one or more set(s) of most likely matches;

Figure 6A is a first exemplary illustration of a technique for matching a sequence map against a consensus optical map;

30 Figure 6B is a second exemplary illustration of the technique for matching the sequence map against the consensus optical map in which the consensus optical map

does not possess any false enzyme cuts and the sequence map does not have any missing enzyme cut(s);

Figure 6C is a third exemplary illustration of the technique for matching the sequence map against the consensus optical map in which the consensus optical map does not possess any false enzyme cuts while the sequence map is missing the enzyme cut(s);

Figure 6D is a fourth exemplary illustration of the technique for matching the sequence map against the consensus optical map in which the consensus optical map has a false enzyme cut and the sequence map does not have any missing enzyme cuts;

Figure 6E is a fifth exemplary illustration of the technique for matching the sequence map against the consensus optical map in which the consensus optical map has a false enzyme cut and the sequence map is missing the enzyme cut;

Figure 6F is a sixth exemplary illustration of the technique for matching the sequence map against the consensus optical map in which left fragments of each of the consensus optical and sequence maps are mismatched;

Figure 6G is a sixth exemplary illustration of the technique for matching the sequence map against the consensus optical map in which right fragments of each of the consensus optical and sequence maps are mismatched;

Figure 7 is a detailed illustration of the exemplary flow diagram of the validation procedure according to the present invention which utilizes dynamic programming principles and the sequence and consensus maps illustrated in Figures 6F and 6G;

Figure 8 is an exemplary embodiment of the process according to the present invention in which an alignment of a simulated order restricted map takes place after (or during) the validation technique has been implemented to determine the accuracy of the simulated order restricted map(s) and/or the consensus optical map(s);

Figure 9 is a detailed illustration of the flow diagram of the process shown in Figure 8;

Figure 10 is a flow diagram of a particular set of steps in the process illustrated in Figure 9 in which best matches are selected for each sequence map and an overall alignment thereof is constructed; and

Figure 11 is an illustration of an example of a possible alignment of a chromosome arrangement using the system and process of the present invention.

Detailed Description

5 Figure 1 illustrates a first exemplary embodiment of a system for validating, aligning and/or reordering a genetic sequence using an optical (consensus) map via map matching and comparison according to the present invention. In this embodiment, the system includes a processing device 10 which is connected to a communications network 100 (e.g., the Internet) so that it can receive optical
10 sequence mapping data and DNA sequence data. The processing device 10 can be a mini-computer (e.g., Hewlett Packard mini computer), a personal computer (e.g., a Pentium chip-based computer), a mainframe (e.g., IBM 3090 system), and the like. The DNA sequence data can be provided from a number of sources. For example, this data can be GenBank Data 110 obtained from GenBank database (NIH genetic
15 sequence database), Sanger Data 120 obtained from Sanger Center database, and/or Celera Data 130 obtained from the Celera Genomics database. These are publicly available genetic databases, or – in the last case – private commercial genetic databases. The optical sequence mapping data correspond to optical mapping data 140 that can obtained from external systems. For example, such optical map data, i.e.,
20 optical mapping ordered restriction data, can be generated using the methods described in U.S. Patent No. 6,174,671, the entire disclosure of which is incorporated herein by reference. In particular, the methods described in this U.S. patent produce high-resolution, high accuracy ordered restriction maps based on data created from images of populations of individual DNA molecules digested by restriction enzymes.

25 As shown in Figure 1, after the processing device 10 receives the optical mapping data and the DNA sequence data via the communications network 100, it can then generate one or more results 20 which can be a validation/determination of the accuracy of the DNA sequence data and/or of the optical mapping data, an alignment of the DNA sequence data based on the results of the validation procedure, and
30 reordering thereof Figure 2 illustrates another embodiment of the system 10 according to the present invention in which the optical mapping data 140 is transmitted to the

-13-

system 10 directly from an external source, without the use of the communications network 100 for such transfer of the data. In this second embodiment of the system as shown in Figure 2, the DNA sequence data 110, 120, 130 is also transmitted directly from the one or more of the DNA sequence databases (e.g., the Sanger Center database, the Celera Genomics database and/or the GenBank database), without the need to use the communications network 100 shown in the first embodiment of Figure 1. It is also possible for the optical mapping data 140 to be obtained from a storage device provided in or connected to the processing device 10. Such storage device can be a hard drive, a CD-ROM, etc. which are known to those having ordinary skill in the art.

A. VALIDATION PROCESS AND SYSTEM

General Flow Diagram

Figure 3 is an exemplary embodiment of the process according to the present invention which is preferably executed by the processing device 10 of Figures 1 and 2. In this exemplary embodiment, the optical mapping data 140 is forwarded to a technique 250 which constructs one or more consensus maps 260, based on this data 140 by considering the local variations among aligned single molecule maps. One example of such technique 250 is a "gentig" computer program as described in T. Anantharaman et al., "Genomics via Optical Mapping II: Ordered Restriction Maps", *Journal of Computational Biology*, 4(2), 1997, pp. 91-118, and T. Anantharaman et al., "Genomics via Optical Mapping III: Contiging Genomic DNA and Variations", AAAI Press, 7th International Conference on Intelligent Systems for Molecular Biology, ISMB 99, Vol. 7, 1999, pp. 18-27, the entire disclosure of which are incorporated herein by reference. In particular, "gentig" software uses a Bayesian-based (probabilistic) approach to automatically generate "contigs" from optical mapping data. For example, "contigs" can be assembled over whole microbial genomes. The "gentig" software repeatedly combines two islands that produce the greatest increase in probability density, excluding any "contigs" whose false positive overlap probability are unacceptable. For example, four parameters in the program can be altered to change the number of molecules that the program "contigs" together,

-14-

thus forming the consensus maps. The details of the consensus maps shall be described herein below in further details.

According to the exemplary embodiment of the present invention, the DNA sequence data (e.g., the GenBank data 110, the Sanger data 120 and the Celera data 13) can be collected at a database collection junction 200, which can be a computer program executed by the processing device 10. This collection can be initiated and/or controlled either manually (e.g., by a user of the processing device 10 to obtain particular DNA sequences) and/or automatically using the processing device 10 or another external device. Upon the collection of the DNA sequence data from one or more of the DNA sequence databases 110, 120, 130, the database collection junction 200 outputs a particular DNA sequence 210 or a portion of such DNA sequence. Thereafter, the data for this DNA sequence 210 (or a portion thereof) is forwarded to a technique 220 which simulates a restriction enzyme digestion process to generate an "in silico" ordered restriction sequence map 230.

Thereafter, the system and process of the present invention executes a validation algorithm 270 which determines the accuracy of the ordered restriction sequence map 230 based on the data provided in the optical consensus map(s) 260. This result can be output as or more results 280 in the form of a response a score (e.g., a rank for each ordered restriction map), a binary output (e.g., the accuracy validated vs. unvalidated), etc.

Provided herein below is a detailed information regarding the consensus maps and the sequence maps.

Consensus (Optical) Map

The consensus optical map can be defined as a genome-wide, ordered restriction map which is represented as a structured item consisting of particular identification data and a variable length vector composed of fragments. For example, the consensus map can be represented by a vector of fragments, where each fragment is a triple of positive real numbers.

$\langle c_i, l_i, \sigma_i \rangle \in R^3$

-15-

and where c_i is defined as the cut probability associated with a Bernoulli Trial, l_i is the fragment size, related to the mean of a random variable with Gaussian distribution having an estimated standard deviation equal to σ_i . For example, the total length of the fragment vector as can be defined as N . Also, it is possible to define an index the
5 vector of fragments from 0 to $N-1$.

The consensus maps can be created from several long genomic single molecule maps, where each molecule map thereof may be obtained from the images of the molecules stretched on a surface and further combined by a Bayesian algorithm implemented in the "gentig" program. As described above, the "gentig" program is
10 capable of constructing consensus maps by considering local variations among the aligned single molecule maps.

Sequence Map

As is generally known, a sequence is a string of letters obtained from a set $\{A, C, G, T, N, X\}$. These letter have a standard meaning in the art of bio-informatics. In
15 particular, the letters A, C, G, T are DNA bases, N is "unknown", and X is a "gap".

A sequence map is an "in silico" ordered restriction map obtained from the sequence by simulating a restriction enzyme digestion process. Hence, each sequence map has some piece of identification data plus the vector of fragments, whose
20 elements encode exactly the size in base-pairs. The sequence map fragment vector j -th element is defined as a number a_j which is the size of the fragment. The total length of the sequence map fragment vector is defined as M . The fragment vector is indexed from 0 to $M-1$.

Thus, each sequence map has at least a portion of identification data of the
25 DNA sequence data 110, 120, 130, in addition to the vector of fragments whose elements encode exactly the size in base-pairs. The sequence map fragment vector j -th element is indicative of a number a_j which corresponds to the size of the fragment. As an example, the total length of the ordered restriction sequence map fragment vector can be M . Thus, the fragment vector can be indexed from 0 to $M-1$.

Overall Process Description

Figure 4 shows an exemplary flow chart of the embodiment of the process according to the present invention for simulating a restriction digestion of the sequence map, and then validating the accuracy of the consensus optical order restriction map and/or the simulated ordered map. This process can be performed by the processing device 10 which is shown in Figures 1 and 2. As shown in this flow chart, the processing device 10 receives the optical ordered restriction data in step 310, which can be the consensus optical map(s) 260 shown in Figure 3. Then, in step 320, the processing device 10 receives the DNA sequence data, which is preferably the DNA sequence 210 which is also shown in Figure 3. In step 330, the restriction digestion of the sequence data is simulated to obtain the simulated (in silico) ordered restriction map which is also shown in Figure 3 as the sequence map(s) 230. Thereafter, in step 340, the accuracy of the optical ordered restriction map and/or of the simulated ordered restriction map is validated, preferably to locate likely matches within one another. Finally, the results of the validation are generated in step 350.

Exemplary Embodiment of Validation Procedure of the Exemplary Process

Figure 5A shows a detailed flow chart of an embodiment of the exemplary validation procedure utilized in step 340 of the process shown in Figure 4. In particular, a current fragment of the optical ordered restriction map is compared to a respective fragment of the simulated ordered restriction map to obtain one or more set(s) of most likely matches (step 3410). Then, the processing device 10 determines if all fragments of the simulated ordered restriction map were checked in step 3420. If not, the process takes the next fragment of the simulated ordered restriction map to be the current fragment for checking performed in step 3430, and the comparison of step 3410 is repeated again for the current fragment of the simulated ordered restriction map. Otherwise, because it is determined that all fragments of the simulated ordered restriction map were checked, all of the matches are ranked in step 3440, and the processing device 10 determines the best match(s) in step 3450. If the processing device 10 determines that the rank of the best match(s) is greater than a predetermined threshold (step 3460), the processing device 10 validates the accuracy of the optical

-17-

ordered restriction map and/or of the simulated ordered restriction map (step 3470). Otherwise such accuracy is not validated in step 3480. It should be understood that the exemplary validation procedure shown in Figure 5A can be performed for one or multiple iterations over the fragments.

5 Figure 5B shows a detailed illustration of an exemplary flow diagram of steps 3410-3430 of Figure 5A in which the fragments of the optical ordered restriction map are compared to the fragment of the simulated ordered restriction map to obtain one or more set(s) of most likely matches. Particularly, in step 4010, Probability $\Pr(D|H(\sigma, p_c, p_f))$, as shall be described in further detail below, is calculated for each
 10 possible alignment of the fragments of the optical ordered restriction map (i.e., the consensus map) against fragments of simulated ordered restriction map (i.e., the sequence map). Then, in step 4020, an overall match probability as a maximum likelihood estimate ("MLE") is calculated by extending the computation over all fragments of the consensus map and all fragments of the sequence map.

15 The exemplary applications of the exemplary embodiment of the process according to the present invention on the sequence and consensus maps are provided in further detail below with reference to Figures 6A-6G.

Statistical Description of the Problem

20 Figure 6A shows an exemplary setup of the matching procedure involving a sequence map (corresponding to the simulated ordered restriction map) and a consensus map (corresponding to the optical ordered restriction map). The sequence map is preferably considered to be an ideal map, i.e., viewed as the hypothesis H of a Bayesian problem to be analyzed, while the consensus map is preferably considered
 25 to be of data D to be validated against hypothesis H . In this manner the following probability density function is formed

$$\Pr(D | H(\sigma, p_c, p_f)),$$

where σ is a standard deviation which summarizes maps wide standards deviation data (e.g., $\sigma = f(\sigma)$ for some function ' f '), p_c is the cut probability, and p_f is the false
 30 positive cut probability. This calculation is shown in Figure 5b and discussed above.

-18-

Ideal Scenario

In an ideal scenario, the orientations of the sequence maps are known, there are no false cuts, and no missing cuts, i.e., $p_c = 1$, and $p_f = 0$, thus the terms associated with these parameters vanish, as it shall be described in further detail below. For example, if a position h in the consensus map is taken, the consensus map fragment sub-vector is provided from the position h to $N-1$. Also, the full fragment vector of the sequence map can be, e.g., from 0 to $M-1$. For the sake of simplicity of the explanation of the present invention, it is possible to remove the h position term of the consensus map fragment sub-vector, and count the consensus map fragments from the position term 0 so that expressions such as l_i instead of l_{h+i} , can be utilized.

To obtain a "match" between the i -th fragments of the consensus map and the corresponding fragments of the sequence map, it is preferable to evaluate to what extent the consensus map and the sequence map deviate from one another. A Gaussian distribution should preferably be utilized for the i -th fragment of each of the maps, and the following expression may be evaluated:

$$\frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(l_i - a_i)^2}{2\sigma_i^2}}$$

Given the above expression, and with the assumption that the sequence map is correct (i.e., $\Pr(H) = 1$), the overall $\Pr(D \mid H(\sigma, \dots))$ function can be provided as:

20

$$\Pr(D \mid H(\sigma, \dots)) = \prod_{i=0}^n \left(\frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(l_i - a_i)^2}{2\sigma_i^2}} \right).$$

To maximize the likelihood of the validation, it is preferable to utilize the logarithm of the simplified expression and obtain the following expression:

$$\ln(\Pr(D \mid H(\sigma, \dots))) = \sum_{i=0}^n \ln \left(\frac{1}{\sqrt{2\pi\sigma_i^2}} \right) - \sum_{i=0}^n \left(\frac{(l_i - a_i)^2}{2\sigma_i^2} \right)$$

25 This express maximizes logarithmic likelihood, therefore it provides a Maximum Likelihood Estimate ("MLE").

-19-

Since it is possible to assume that the first term of the MLE does not vary extensively from one location to another, it is preferable to simplify the problem by minimizing a “weighted sum-of-error-square” cost function.

$$F(D) = \sum_{i=0}^n \left(\frac{(l_i - a_i)^2}{2\sigma_i^2} \right)$$

- 5 Minimizing function $F(D, \dots)$ may yield the “best match” of the sequence map (represented as H) against the consensus map (represented as D).

According to the present invention, it is preferable to take into account the two possible orientations of the sequence map with respect to the consensus map. Below, *false cuts* and *missing cuts* in the consensus map are considered.

10

Orientation

Since the sequence map can be evaluated against the consensus map by “reversing” its orientation, the expression for $\Pr(D, \dots | H)$ can be rewritten as:

$$15 \quad \Pr(D, | H(\dots)) = \max[\Pr_1(D, | H(\dots)), \Pr_2(D | H^R(\dots))],$$

where H^R represents the reversed sequence map. As provided previously, it is possible to construct the function F as:

$$F(D, H) = \max[F_1(D, H), F_2(D, H^R)].$$

20

Thus, the expression for $F_2(D, H^R)$ will be as follows:

$$F_2(D, H^R) = \sum_{i=0}^n \left(\frac{(l_i - a_{(n-i)})^2}{2\sigma_i^2} \right)$$

False Cuts and Missing Cuts

- 25 In order to correctly model errors in the matching process, it is preferable to take into account false cuts and missing cuts. For example, the matching process can be modeled with two parameters:

- Missing restriction sites in the sequence map are preferably modeled by a probability p_c (i.e., a “cut” probability). In particular, $p_c = 1$ means

-20-

that the restriction sites are actually present in the map, $0 \leq p_c < 1$ means that there are some missing cuts, etc.

- False restriction sites in the consensus map are preferably modeled by a rate parameter p_f (i.e., a "false" cut probability). In an exemplary case, $0 < p_f \leq 1$ means that the consensus map may have some false cuts.

These parameters should preferably be included in the expression describing $\text{Pr}(\dots)$ and, therefore in the function $F(\dots)$ described above.

- 10 **Example 1: No missing cuts and no false cuts.** In this example as shown in Figure 6B, the term for the matching of the i -th fragment of the sequence map 610 against the i -th fragment of the consensus map 620 should preferably take into account the cut probability p_c . Thus, the expression is as follows:

$$p_c \times \frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(l_i - a_j)^2}{2\sigma_i^2}}.$$

- 15 which yields the cost function, after taking the negative log likelihood.

$$\ln \left(\frac{\sqrt{2\pi\sigma_i^2}}{p_c} \right) + \frac{(l_i - a_j)^2}{2\sigma_i^2}.$$

- 20 **Example 2: Missing cuts and no false cuts.** In this example and as shown in Figure 6C, the exemplary embodiment of the system and method of the present invention considers a cut in the sequence map 630 that has no corresponding cut in the consensus map 610. A match is attempted of the i -th consensus map fragment against the aggregation of the j and $j - 1$ fragments in the sequence map 630. For example, the computation of the Gaussian expression should be "penalized" by taking into account the missing cut. The main term is preferably modeled as:

-21-

$$p_c \times \frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(l_i - (a_j + a_{(j-1)}))^2}{2\sigma_i^2}} \times (1 - p_c).$$

yielding a cost function:

$$5 \quad \ln\left(\frac{\sqrt{2\pi}\sigma_i}{p_c}\right) + \frac{(l_i - (a_j + a_{(j-1)}))^2}{2\sigma_i^2} + \ln\left(\frac{1}{1 - p_c}\right).$$

Example 3: No missing cuts and some false cuts. In this case and as shown in Figure 6D, the converse case of Example 2 is being considered. A false cut event of the consensus map 640 can be modeled as a Bernoulli trial with probability p_f . For example, the full term for such matching would likely aggregate fragments i and $i - 1$ of the consensus map 640 against the j -th fragment of the sequence map 620. The full term would likely be:

$$p_c \times \frac{1}{\sqrt{2\pi(\sigma_i^2 + \sigma_{(i-1)}^2)}} e^{-\frac{((l_i + l_{(i-1)}) - a_j)^2}{2(\sigma_i^2 + \sigma_{(i-1)}^2)}} \times p_f.$$

15 Taking the negative log likelihood again, the following expression is obtained:

$$\ln\left(\frac{\sqrt{2\pi(\sigma_i^2 + \sigma_{(i-1)}^2)}}{p_c}\right) + \frac{((l_i + l_{(i-1)}) - a_j)^2}{2(\sigma_i^2 + \sigma_{(i-1)}^2)} + \ln\left(\frac{1}{p_f}\right).$$

It should be noted that for the current data obtained from the optical mapping process, $p_f = 10^{-5}$. This current data often dominate the complete expression.

Example 4: Some missing cuts and some false cuts. Of course, it is conceivable that there may be missing cuts and false cuts together as shown in Figure 6E. It is possible to accurately match or align the $i - u$ cut in the sequence map 660 against the $j - v$ cut in the consensus map 650. It is also possible to properly match the $(i + 1)$ -th cut (the cut immediately following the i -th fragment in both the consensus map 650 and the sequence map 660) in the two maps by appropriately treating all the intervening missing cuts in sequence map 660 and all the intervening false cuts in the consensus map 650. In this case, the "matching term" has the following general form:

-22-

$$\begin{aligned}
& p_c \times \frac{1}{\sqrt{2\pi (\sigma_i^2 + \sigma_{(i-1)}^2 + \dots + \sigma_{(i-v)}^2)}} \\
& \times e^{-\left(\frac{((l_i + l_{(i-1)} + \dots + l_{(i-v)}) - (a_j + a_{(j-1)} + \dots + a_{(j-u)}))^2}{2(\sigma_i^2 + \sigma_{(i-1)}^2 + \dots + \sigma_{(i-v)}^2)} \right)} \\
& \times (1 - p_c)^{(u-1)} \\
& \times p_f^{(v-1)}.
\end{aligned}$$

Taking the negative log likelihood, the following expression is obtained:

$$\begin{aligned}
& -\ln p_c + \ln \left(\sqrt{2\pi (\sigma_i^2 + \sigma_{(i-1)}^2 + \dots + \sigma_{(i-v)}^2)} \right) \\
& + \frac{((l_i + l_{(i-1)} + \dots + l_{(i-v)}) - (a_j + a_{(j-1)} + \dots + a_{(j-u)}))^2}{2(\sigma_i^2 + \sigma_{(i-1)}^2 + \dots + \sigma_{(i-v)}^2)} \\
& + (u-1) \ln \frac{1}{1 - p_c} \\
& + (v-1) \ln \frac{1}{p_f}.
\end{aligned}$$

B. DYNAMIC PROGRAMMING PROCEDURE

The validation of a sequence map against the optical map can be implemented as a dynamic programming procedure ("DPP"). Detailed descriptions of the DPP are provided in T. H. Cormen et al., "Introduction to Algorithms", The MIT Press and McGraw-Hill, 1990, and D. Gusfield, "Algorithms on Strings, Trees, and Sequences", Cambridge University Press, 1997, the entire disclosures of which is incorporated herein by reference. An exemplary DPP for the process according to the present invention is as follows:

```

Procedure sequence-map-validate (sequence-map, consensus-map)
/* Other parameters will be specified . . . e.g., pf, pc, k, etc. */
begin
    run DPP on consensus-map and sequence map;
    run DPP on consensus-map and reversed sequence map;

```

-23-

collect the k "best" alignments by examining the last row of both DPP tables and "return" them;

end

This DPP procedure can be executed two or more times. It is improbable for two alignments for the sequence map and for its reversed version to have equivalent scores. It is preferable to start from the DPP's *main recurrence* to obtain a formulation of the sequence map vs. consensus map matching expression.

Dynamic Programming "Main" Recurrence

For the description provided below, index i shall be used to indicate a fragment in the consensus map, and the index j to indicate a fragment in the sequence map. Assuming that the consensus map has M fragments and that the sequence map has N fragments, the DPP may preferably utilize a $N \times M$ matching table T . Considering the entry $T[i, j]$, this entry will likely contain the partially computed value of the matching function $F(\dots)$. For example, $F(\dots)$ would be incrementally computed from "left" to "right" by taking into consideration all possible fragment by fragment matches.

The main recurrence for entry $T[i, j]$ is provided as follows:

$T[i, j] :=$

$$\min_{\substack{0 < u \leq i \\ 0 < v \leq j}} \left(\begin{aligned} &T[i-u, j-v] \\ &+ \ln \left(\frac{\sqrt{2\pi} (\sigma_i^2 + \sigma_{(i-1)}^2 + \dots + \sigma_{(i-v)}^2)}{p_c} \right) \\ &+ \frac{((l_i + l_{(i-1)} + \dots + l_{(i-v)}) - (a_j + a_{(j-1)} + \dots + a_{(j-u)}))^2}{2(\sigma_i^2 + \sigma_{(i-1)}^2 + \dots + \sigma_{(i-v)}^2)} \\ &+ (u-1) \ln \frac{1}{1-p_o} \\ &+ (v-1) \ln \frac{1}{p_f} \end{aligned} \right).$$

The determination of the respective sizes of u and v should be performed. In one exemplary embodiment of the present invention, the sizes of u and v should preferably depend on i 's. In another exemplary embodiment of the present

-24-

invention, u and v may also depend also on the digestion rate of the “in vivo” experiment that breaks up the DNA molecule. However, a pragmatic bound may be equal to, e.g., 3 times the overall standard deviation (which in practice can be approximated by the value 3). This bound may preferably become a parameter of the DPP. In this way, the computation for each entry $T[\cdot, \cdot]$ should consider approximately 9 neighboring or adjacent entries.

A simple model for the initial conditions should preferably be as follows:

$$T[i, 0] := \infty, \text{ for } i \in [1, N].$$

$$T[i, 0] := 0, \text{ for } j \in [1, M]$$

10

In this model, it is preferably to never match or strongly penalize a match of the first fragments of the consensus map against an “inner” fragment of the sequence map (*cf.* first column having a ∞ value). Also, the match of any fragment of the consensus map can be made against the first fragment of the sequence map rather neutral (with the first two zero values). A more complex model initializes the first row of the dynamic programming table by taking into account, e.g., only the size of the i -th fragment. Provided below is an exemplary description of a complete model for the above-referenced boundary conditions.

20 Left and Right End Fragment Computations.

It is possible to provide a more sophisticated and accurate model for the left fragments and right fragments calculations (i.e. for the initial and final conditions). Such models take into consideration the case in which certain fragments on either the left or the right of the sequence map do not “properly match” any fragment in the consensus map.

25

I. Left End Penalty Computation

As shown in Figure 6F, the first “matching fragments” are a_2 from the sequence map 680, and l_j from the consensus map 670, identified by their size. The general case is for fragment i of the sequence map 680 to match fragment j of the consensus map 670.

30

-25-

An analysis of the fragment a_0 of the sequence map 680 is as follows. Most of the time, the left end of this fragment a_0 (which can assume not to be corresponding to an actual restriction site) will fall within the boundaries of fragment $i - n$ of the consensus map 670 (for $0 \leq n \leq i$).

5 Within this framework, the minimum value that can be assigned to a "match" of the left end fragments of the sequence map 680 corresponds to one of three cases:

- Match by *extension* of the first left end fragment of the sequence map 680.
- Bad matches until fragment i of the sequence map matches fragments j of the consensus map 670.
- Match without extension to some fragment in the consensus map 670.

15 **Example 1: Extending a_0 by x leads to a match.** If a_0 is "extended" by an extra size x (as shown in Figure 6F), x is extended as far to the left as possible to match the cut on the left of fragments $i - n$ (e.g., fragment of size l_{i-2} illustrated in Figure 6F).

The value of this match (which is built on top of the derivation performed for the "regular case") is provided by the following expression:

$$\begin{aligned}
 & \ln \left(\frac{\sqrt{2\pi (\sigma_{(i-n)}^2 + \sigma_{(i-(n-1))}^2 + \dots + \sigma_i^2)}}{p_c} \right) \\
 & + \frac{((l_{(i-n)} + l_{(i-(n-1))} + \dots + l_i) - (x + a_0 + a_1 + \dots + a_j))^2}{2(\sigma_{(i-n)}^2 + \sigma_{(i-(n-1))}^2 + \dots + \sigma_i^2)} \\
 & + \frac{x}{L} \\
 & + (n-1) \ln \frac{1}{p_f} \\
 & + j \ln \frac{1}{1-p_c}.
 \end{aligned}$$

25 This case express depends on two parameters which did not appear in the regular case:

-26-

- x being the size extension (please note it in the second and the third term), and
- L being the molecule map average fragment size.

5 The second sub-term is preferably the regular "sizing error" penalty which takes into account the extension x . The third sub-term may add an extra penalty based on the amount of the end fragment being stretched with respect to the overall structure of the expression. To utilize the expression, it is beneficial to find where its minimum with respect to the position of x . By differentiating in this manner, the expression can
10 be minimized by setting x as follows:

$$x = \left((l_{(i-n)} + l_{(i-(n-1))} + \dots + l_i) - (a_0 + a_1 + \dots + a_j) \right) - \frac{(\sigma_{(i-n)}^2 + \sigma_{(i-(n-1))}^2 + \dots + \sigma_i^2)}{L}$$

By substituting this value for x in the original expression, the following expression is obtained:

$$\begin{aligned} & \ln \left(\frac{\sqrt{2\pi (\sigma_{(i-n)}^2 + \sigma_{(i-(n-1))}^2 + \dots + \sigma_i^2)}}{P_c} \right) \\ & + \frac{((l_{(i-n)} + l_{(i-(n-1))} + \dots + l_i) - (a_0 + a_1 + \dots + a_j))}{L} \\ & + \left(-\frac{1}{2L^2} \right) (\sigma_{(i-n)}^2 + \sigma_{(i-(n-1))}^2 + \dots + \sigma_i^2) \\ & + n \ln \frac{1}{P_f} \\ & + j \ln \frac{1}{1 - P_c}. \end{aligned}$$

Again, the last two sub-terms may account for the false cuts and the missing cuts,
20 respectively. It is possible to assume that there is at least one "good" cut in the sequence map.

Example 2: No extension and bad matches until i and j . In this case, the first
"good match" is located when fragment i of the sequence map matches fragments j of
25 the consensus map. The expression corresponding to this case is

-27-

$$n \ln \left(\frac{1}{p_f} \right) + (j+1) \ln \left(\frac{1}{1-p_c} \right)$$

This expression takes into consideration (and possibly corrects) all missing matches and the false matches in both maps (e.g., the $j+1$ term takes into account the 0-th cut as a missing cut).

Case 3: Match without extension to some fragment in the consensus map. It shall be assumed that a "good match" exists between fragment i of the consensus map and fragments j of the sequence map, and, as with Example 1 of this subsection, the fragment from the consensus map (which is within which the end of fragment 0 - size a_0 - of the sequence map lies) is indexed $i - n$.

A match of the fragment 0 of the sequence map to any of the n fragments up to fragment i of the consensus map as then attempted. All possible missing cuts and false cuts along the way are taken into consideration. The attempt of minimizing the following expression (dependent on k) will likely compete against the expressions in Examples 1 and 2 for the best end match.

$$\min_{0 \leq k \leq i} \left[\frac{\left((l_{(i-k)} + l_{(i-k-1)} + \dots + l_i) - (x + a_0 + a_1 + \dots + a_j) \right)^2}{2(\sigma_{(i-k)}^2 + \sigma_{(i-k-1)}^2 + \dots + \sigma_i^2)} + (k-1) \ln \frac{1}{p_f} + j \ln \frac{1}{1-p_c} \right]$$

II. Right End Penalty Computation

Figure 6G shows an exemplary illustration of the maps which are utilized for the right end penalty computation, i.e., for fragments trailing the end of the sequence map 690 and/or of the consensus map 680. This computation is *almost* symmetric to the left end penalty computation described above.

However, there is a difference to be taken into account for the right end computation which makes the computation asymmetrical with respect to the left end penalty computation described above. When the "last good match" between fragment i of the consensus map 670 and fragment j of the sequence map 690 is considered, a

-28-

consideration of what is the score of the match up to that point should also be undertaken. In particular, the value $T[j, i]$ should be considered (thus assumed to be available at that point).

Thus, as per the left end computation, three terms should be considered. They
5 are analogous to the three terms for the left end computation, but they should be augmented with $T[j, i]$ to be meaningful.

III. Description of the Exemplary Validation Procedure

Figure 7 shows a detailed illustration of the exemplary flow diagram and
10 architecture of the validation procedure according to the present invention which utilizes dynamic programming principles and the sequence and consensus maps illustrated in Figures 6F and 6G. Each box represents the solution of a "dynamic programming"-like problem. In particular, the map data is provided to a left end table 360 which then passes at least a portion of such data to a middle table 365. The output
15 of both the left end table 360 and the middle table 365 are combined in block 370, and the combined results are forwarded to a results table I 375. Then, at least a portion of the data from the results table I 375 is passed to a right end table 380, and the combined results are forwarded to a results table II 385. The data in the results table I 375 and the results table II 385 are computed using the scores contained in the other
20 tables (e.g., the left end table 360, the middle table 365 and the right end table 380). The overall computation uses these three tables 360, 365, 380 as follows:

- the $T[., .]$ for the middle table computation;
- the $TL[., .]$ for the left end penalty computation; and
- the $TR[., .]$ for the right end penalty computation.

25 It is also possible to re-use certain tables to save memory and system resources of the processing device 10. The flow of control produces the content of each table 360, 365, 380, in turn, and the final resulting table (e.g., the results table II 385) can be examined to reconstruct the alignment trace-back.

-29-

IV. Possible Optimization

Filling the entire $T[.,.]$ table, i.e., the middle table 365, may take on the order of 4 times $O(N^2M \min(N,M))$ to complete, where N is the size of the sequence map and M is the size of the consensus map. However, it is possible to optimize the filling
5 of the middle table 365 down to $O(NM \min(N,M))$ by utilizing the limiting argument on the computation performed for each entry $T[i, j]$. Because of the limit on u and v , the computation time for each entry can be considered "constant".

In a simple setup, the middle table 365 may take up $O(NM)$ space, hence it too may be quadratic even when extra "backtrace recording" is considered, as described
10 in Gusfield, D., "Algorithms on Strings, Trees, and Sequences", Cambridge University Press, 1997.

It is also possible to optimize the execution time via a hashing scheme similarly to the scheme used in the "gentig" program. In such case, the time complexity can be reduced by a further order of magnitude.

15

Experimental Results

The first experiments using software based on the system and method described above checked "in silico" maps obtained from *Plasmodium falciparum* sequence data against optical ordered restriction maps for the same organism.

20 I. Plasmodium falciparum Sequence Data

The sequence for the *Plasmodium falciparum*'s 14 chromosomes was obtained from the Sanger Institute database (www.sanger.ac.uk) and from the TIGR database (www.tigr.org). The experiment cut the sequences "in silico" using the BamHI restriction enzyme. The resulting maps were fed to the software (implementing the
25 process according to the present invention) along with appropriate optical ordered restriction maps.

The results of the experiments on chromosome 2 and chromosome 3 (showing a number of fragments) are provided below, as well as the experiment on all chromosomes using a particular enzyme (e.g., NheI).

30

-30-

Chromosome	Number of Fragments	
	<i>from DB</i>	<i>reversed</i>
chr 2	30	23
chr 3	36	28

Two "in silico" maps were provided for the chromosome 2 and chromosome 3 sequences with the fragment numbers obtained being provided in the table above. The molecule maps thus produced were then sent to the validation checker alongside
5 various consensus maps.

II. Plasmodium falciparum Optical Ordered Restriction

An optical ordered restriction map published in J. Jing et al., "Optical Mapping of Plasmodium Falciparum Chromosome 2", Genome Research, 9:175-181,
10 1999 and Z. Lai et al., "A shotgun optical map of the entire Plasmodium Falciparum genome", Nature Genetics, 23:309-313, 1999, and the maps generated by the "gentig" program were utilized for this experiment. The "gentig" program provided the use of the indication of the overall standard deviation to be used for each fragment of the consensus map. The parameter used was:

15

$$\sigma = 4.4754 \text{ Kbps},$$

and each fragment was assigned a standard deviation of:

20

$$\sigma \sqrt{\frac{l}{L}}, \text{Kbps}$$

where l is the fragment size and L is the average consensus map fragment size.

III. Validation Procedure Results

The validation DPP according to the present invention was executed on
25 chromosome 2 and chromosome 3. The DPP ran with the following limitations:

- The u and v parameters for the main recurrence formula were set to 3.

-31-

- The procedure for matching the left and right ends of the sequence maps using the special computations described above was not utilized.

The summary of the results are provided below in Tables 1-3. Table 1 and 3 show the match of the sequence maps for chromosomes 2 and 3 against the consensus maps generated by the "gentig". Table 2 shows the match of the sequence maps against the consensus map which as published in M. J. Gardner et al., "Chromosome 2 sequence of the human malaria parasite *Plasmodium falciparum*", Science, 282:1126-1132, 1998. The position of the matches of the sequence against the consensus maps are also shown in Tables 1-3.

Table 1 - Chromosome 2 Validation Summary A

rank	matches	score	map id	# missing cuts	# false cuts
1	29	80.869	1302	0	1
2	28	105.861	1302	2	1
3	18	126.956	1326	12	4
4	22	127.488	1305	8	4
5	18	132.890	1414	12	2

10

In particular, Table 1 shows the data for the best "matches" found by the validation procedure of the present invention for the case of *Plasmodium falciparum* chromosome 2. The "in silico" sequence map was obtained from the TIGR database sequence. The sequence map (as well as its reversed) was checked against 75 (optical) consensus maps produced by the gentig program. The 75 optical maps cover the entire *Plasmodium falciparum* genome. The validation procedure located its best matches against the map tagged 1302.

15

Table 2 - Chromosome 2 Validation Summary B

rank	matches	score	map id	# missing cuts	# false cuts
1	29	77.308	NYU-WISC	1	0
2	22	125.088	NYU-WISC	8	2
3	22	130.866	NYU-WISC	8	4
4	24	131.475	NYU-WISC	6	1
5	24	132.838	NYU-WISC	6	4

-32-

Table 2 shows the data for the best "matches" found by the validation procedure of the present invention for the case of *Plasmodium falciparum* chromosome 2. The "in silico" sequence map was obtained from the TIGR database sequence. The sequence map (as well as its reverse) was checked against the map published in M. J. Gardner et al. publication.

Table 3 - Chromosome 3 Validation Summary

rank	matches	score	map id	# missing cuts	# false cuts
1	35	108.360	1365	1	0
2	32	117.571	1365	4	1
3	32	119.956	1365	4	2
4	35	121.786	1296	1	3
5	31	125.265	1365	5	1

Table 3 shows the data for the "best" matches found by the validation procedure of the present invention for the case of *Plasmodium falciparum* chromosome 3. The "in silico" sequence map was obtained from the Sanger Institute database sequence. The sequence map (as well as its reversed) was checked against 75 (optical) consensus maps produced by gentig. The 75 optical maps cover the entire *Plasmodium falciparum* genome. The validation procedure located its best matches against the map tagged 1365.

The processing device 10 of the present invention was executed at approximately $75 \times 4 = 300$ DPP instances in about 5 minutes during the experiment. Also, during this experiment, the processing device 10 kept track of all the intermediate results and made them available for interactive inspection after the actual execution. Also, the sequence, the sequence map, and the consensus maps, were always available for inspection and manipulation

IV. Conclusion

The statistical model of an exemplary embodiment of the present invention is essentially a formulation of a maximum likelihood problem which is solved by minimizing a weighted sum-of-square-error score. The solution is computed by constructing a "matching table" using a dynamic programming approach whose overall complexity is of the order $O(NM \min(N, M))$ (for our non-optimized

solution), where N is the length of the consensus map and M is the length of the consensus map. The preliminary results of the experiment described above illustrate how the process and system of the present invention can be used in assessing the accuracy of various sequence and map data currently being published in a variety of formats from a many different sources.

B. ALIGNMENT AND REORDERING PROCESS AND SYSTEM

Overall Alignment Process Flow Diagram

Figure 8 shows an exemplary embodiment of the process for aligning sequences using optical maps according to the present invention which can also be executed by the processing device 10 of Figures 1 and 2. In this exemplary embodiment and similarly to the validation process illustrated in Figure 3, the optical mapping data 140 is forwarded to a technique 250 (e.g., the "gentig" program) which constructs one or more consensus maps 260 based on the optical mapping data 140 by considering the local variations among aligned single molecule maps.

According to this exemplary embodiment of the alignment process of the present invention, the particular DNA sequence 210 or a portion of such DNA sequence is provided. Thereafter, the data for this DNA sequence (or a portion thereof) is forwarded to a technique 220 which simulates a restriction enzyme digestion process to generate an "in silico" ordered restriction sequence map 230. The system and process of the present invention may then executes the validation algorithm 270 which determines the accuracy of the ordered restriction sequence map 230 based on the data provided in the optical consensus map(s) 260. As with the validation procedure of Figure 3, this result can be output 280 in the form of a response a score (e.g., a rank for each ordered restriction map), a binary output (e.g., the accuracy validated vs. unvalidated), etc. The exemplary embodiments of the validation process and system of the present invention have been described in great detail herein above. Finally, the simulated ordered restriction sequence map(s) can be aligned against the optical ordered restriction map in block 400. In one exemplary embodiment of the alignment process of the present invention, for each simulated ordered restriction map, the best anchoring position of such map is located on the

ordered restriction consensus map (e.g. an optical consensus map). The result of such location procedure is the generation of the entire set of anchoring positions of the simulated ordered restriction maps. In one preferred embodiment, the best anchoring positions are provided first to effectuate the best possible alignment. This can be done using a one-dimensional Dynamic Programming Procedure. Those having ordinary skill in the art would clearly understand that it is possible to produce multiple alignments for the simulated ordered restriction maps due to many anchoring positions than may be available. Provided below are further details of the alignment process and system according to the present invention.

10

Detailed Flow Diagram of Alignment Process

Figure 9 shows an exemplary flow chart of the embodiment of the process according to the present invention for simulating a restriction digestion of the sequence map, validating the accuracy of the consensus optical order restriction map and/or the simulated map, and constructing an alignment therefore. This process can be performed by the processing device 10 which is shown in Figures 1 and 2. Similarly to the validation process shown in Figure 4, the processing device 10 receives the optical ordered restriction data in step 410, which can be the consensus optical map(s) 260 shown in Figure 8. Then, in step 420, the processing device 10 receives the sequence data, which is preferably the DNA sequence data 210 also shown in Figure 8. In step 430, the restriction digestion of the sequence data is simulated to obtain the simulated (in silico) ordered restriction map which is also shown in Figure 8 as the sequence map(s) 230. Thereafter, the optical ordered restriction map is compared to the simulated ordered restriction map to obtain one or more sets of most likely matches (step 440). The processing device 10 then determines if all the simulated ordered restriction maps were checked in step 445. If not, the process takes the next simulated ordered restriction map to be the current simulated ordered restriction map to be checked in step 450, and the comparison of step 440 is repeated again for the current simulated ordered restriction map. Otherwise, since it is determined that all the simulated ordered restriction maps were checked, all of the matches are ranked in step 460, and the processing device 10

-35-

determines the best match(s) for each simulated ordered restriction map based on the respective ranks in step 470. Then, in step 480, the alignment of the simulated ordered restriction map is constructed with respect to the optical ordered restriction maps based on the score of the matches.

5

Global Alignment

To reiterate, the validation process and system of the present invention described above can match an ordered restriction sequence map against an ordered restriction consensus map. This validation process and system can be possibly described as a positioning process of the sequence map against the consensus map. When many sequences positioning are taken into consideration, it may be possible to describe the validation process as a "global" collective alignment against a particular consensus map. Thus, for the sake of clarity, the output of the procedure that produces this final result shall be referred to herein below as an *alignment*.

For example, the result of n "validation experiments" can be identified as n sets of possible sequence positions along the consensus map. Each of these results can be denoted as set S_i (with $0 < i \leq n$), with $|S_i| = k$. Each of the k items in each S_i is a triple $[s_i, x_{(i,j)}, v_{(i,j)}]$ - where S_i is a sequence map identifier, $x_{(i,j)}$ is the j -th *alignment* of s_i against the consensus map, and $v_{(i,j)}$ is the sequence alignment score (with $0 < j \leq k$) obtained from the single sequence (map) positioning process. The set containing every S_i (with $0 < i \leq n$) is called S .

An exemplary embodiment of the procedure to perform the matching, ranking and alignment steps 440-480 using the sequence maps and costs described above is provided below with reference to Figure 10. The end result will preferably be an alignment whose overall cost C can be computed by summing all the costs $v_{(i,j)}$ eventually selected.

Initially, in step 510, the global cost C is set to infinity. Then, in step 520, the best matches out of each set S_i of simulated ordered restriction maps (i.e., sequence maps) against the optical ordered restriction map (i.e., the consensus map) are selected. The best matches are grouped into a set of triples called T_s , and the cost $v_{(i,j)}$ and the position $x_{(i,j)}$ of each respective sequence S_i are analyzed. The cost V of this

30

-36-

set of triples T_S is then computed using, e.g., a specialized 1D Dynamic Programming Procedure (step 540), and compared to C . If V is equal to C plus or minus a tolerance value (step 550), then the set of triples T_S is determined to be the result of the alignment procedure (step 580). If V is not equal to C plus or minus a tolerance value, then first C is equated to V , and the triple $[s_b, x_{(i,j)}, v_{(i,j)}]$ corresponding to the best of the "second best" among the S_i 's is selected (step 570). The triple $[s_b, x_{(i,j)}, v_{(i,j)}]$ is then removed from the set of triples T_S , and the triple $[s_b, x_{(i,j')}, v_{(i,j')}]$ (with j different from j') is inserted into the set of triples T_S (step 575). A new V is then computed from the updated set of triples T_S (step 540).

10 Provided below is an exemplary map-based alignment algorithm/problem which can be utilized with the alignment process and system of the present invention.

Let $S = \bigcup S_i$. For example, at most one triple from each S_i can be selected while satisfying the following global conditions/objectives which can possibly be relaxed:

1. When anchoring two or more selected triples within the alignment T_S , two selected sequences s_p and s_q anchored at their respective $x_{(p,b)}$ and $x_{(q,a)}$, preferably do not overlap (for suitable p, q, a , and b and p not equal to q);
2. $\sum_i (I_i \times v_{(i,j)})$ is minimized over each j in the sequences set S_i so that as many as possible sequence maps S_i 's are included in the alignment; and
3. the number of non-selected sequences, $n - \sum_i I_i$ is minimized.

20 where I_i is an indicator variable assuming a value 1 if the triplet from the sequence S_i is included in the chosen set T_S , and 0 otherwise.

It should be understood that the objectives (2) and (3) provided above may conflict. In particular, the minimum of the objective (2) is achieved when no sequence is selected, while with the objective (3), it is preferable to choose as many sequences as possible, irrespective of the score values. This conflict may be resolved by, e.g., a weighting scheme involving a Lagrangian-like term which linearly combines the two contradictory objectives.

It is possible to solve this problem by using various approximation algorithms. For example, the following two algorithms/procedures:

-37-

1. a "Greedy" algorithm/procedure, and
2. a "Dynamic Programming" algorithm/procedure.

During the experimentation of the alignment system and process of the present invention, the Greedy algorithm/procedure and the Dynamic Programming algorithm/procedure were utilized with successful results. Provided below are the detailed description of these algorithms/procedures (1)-(2) of the present invention.

Greedy Algorithm/Procedure

A solution P can be constructed such that each S_i is ordered by value $v_{(i,j)}$. Then, the best item from each sequence S_i is placed in the partial solution P by selecting the sequences in the order imposed by each $x_{(i,j)}$. It should be understood that the final solution P is not guaranteed to be optimal; however, this solution may provide the results which may be acceptable to the implementers of the alignment procedures.

Dynamic Programming/Procedure

This algorithm/procedure is based on the traditional dynamic programming approach. Indeed, the implementation of this algorithm/procedure is straight forward and space-efficient as provided below. The problem can first be considered for one exemplary case when $k = 1$, and an appropriate algorithm can be selected. Next, the general case when $k > 1$ can be considered, and good approximation heuristics may be devised.

(a) Alignment procedure for Sequence number k being 1. If the number of sequences k present in each set S_i of triples is restricted to be 1 (e.g., being the best score), then the problem yields to a feasible and efficient algorithm. In general, if the sequence matches uniquely to one map location, then this case should apply. An exemplary embodiment of the alignment algorithm for the dynamic programming solution, constructing the solution P , is described below. In particular,

-38-

1. Sort all the triples of sequence, cost and position, $\langle s_i, x_{(i,1)}, v_{(i,1)} \rangle$ in ascending $x_{(i,1)}$ order, and store the result in a list L . Thereafter, the indices i and j can be assumed to range over the list L .
2. Construct two vectors $C[i]$ and $B[i]$ ($0 < i \leq n$), where each entry in global cost C is defined to be the *cost* of including s_i in an alignment that already contains sequences, or a subset thereof, up to S_j ; and the index j is stored in $B[i]$.

The update rules for $C[i]$ and $B[i]$ preferably search backward in the C vector for values which minimize the cost function, and set B to "point back" to the chosen point. For example,

$$C[i] = \max_{0 < j < i} (C[j] + W(\lambda; i)) \text{ such that } S_i \text{ does not overlap with } S_j,$$

$$B[i] = j.$$

$W(\lambda; i)$ function takes into consideration the conflicting nature of the objectives described above. Since it is most likely not possible to optimize both objectives simultaneously, a weight function can be generated (where a user may supply the parameter λ) which would preferably account for both objectives. Two exemplary W functions are provided below:

$$W_1(\lambda; i) = |S_i| - \lambda \cdot v_i,$$

$$W_2(\lambda; i) = 1 - \lambda \cdot v_i.$$

W_1 takes into account the "span" covered by the selected sequences (where $|S_i|$ is the size of the sequence). W_2 takes into account the number of sequences which were selected. The parameter λ is controlled by the user.

(b) Alignment Procedure for Sequence Number $k > 1$. If sequence number $k > 1$, then the procedure may be more complex. Since for each set S_k , there may be k number of alignments to select from, the complexity involved in a straightforward generalization of the preceding procedure is conjectured to grow exponentially. It is possible to use a heuristic procedure/algorithm to produce an acceptable solution in the case when the sequence number $k > 1$. The concept of this procedure is to iterate or repeat the dynamic programming procedure (i.e., $k = 1$ case) on an input set that

-39-

takes the best possible solutions from each sequence S_i while ignoring the non-overlapping constraint. This solution can be further improved in the subsequent iteration by constructing a new input to the DPP procedure (i.e., where $k = 1$) that consists of the preceding solution augmented with an element from each sequence S_i 5 excluded in the preceding solution. Because the preceding solution is also a solution of the new expression, the new solution is at least as effective as the solution previously provided. In each iteration, the basic solution can also be a general (and possibly suboptimal) solution. Because when an item is removed from consideration, it is never again reconsidered; thus, according to a preferred embodiment of the 10 present invention, there can be only $O(kn)$ iterations, and each iteration involves $O(n^2)$ work. Hence a naive analysis yields an $O(kn^3)$ time algorithm.

Experimental Results

Figure 11 shows an illustration of a possible alignment of an exemplary 15 chromosome arrangement using the system and method of the present invention. In particular, a region of the alignment of *P. falciparum*'s Chromosome 12 is shown therein which was generated using the software implementing an exemplary embodiment of the validation, alignment and reordering system and method of the present invention. The two underlined maps in position 39 and 50 of the figure 20 illustrate an acceptable anchoring of "contigs" 11 and 13 to the optical ordered restricted map. Also, the alignment was obtained without any overlap filter.

One having ordinary skill in the art would clearly recognize that many other applications of the embodiments of the system and process for validating and aligning 25 of the simulated ordered restriction maps according to the present invention. Indeed, the present invention is in no way limited to the exemplary applications and embodiments thereof described above.

CLAIMS

1. A process for comparing ordered segments of a first DNA map with ordered segments of a second DNA map to determine a level of accuracy of at least one of the
5 first DNA map and the second DNA map, comprising the steps of:
 - a) receiving the first and second DNA maps, the first DNA map corresponding to a sequence DNA map, the second DNA map corresponding to a genomic consensus DNA map as provided in an ordered restriction DNA map; and
 - b) validating the accuracy of at least one of the first DNA map and the second
10 DNA map based on information associated with the first and second DNA maps.
2. The process according to claim 1, wherein the validating step comprises determining whether one or more matches exist between ordered segments of the first
15 DNA map and the ordered segments of the second DNA map.
3. The process according to claim 2, wherein the validating step further comprises obtaining a number of the matches which exist between the segments of the first DNA map and the segments of the second DNA map after the determining
20 substep.
4. The process according to claim 1, wherein the validating step comprises determining whether the first DNA map includes one or more cuts which are missing from the second DNA map.
25
5. The process according to claim 4, wherein the validating step further comprises obtaining a number and locations of the missing cuts, after the determining substep, based on the first and second DNA maps.

-41-

6. The process according to claim 1, wherein the validating step comprises determining whether the second DNA map includes one or more cuts which are absent from the first DNA map.
- 5 7. The process according to claim 6, wherein the validating step further comprises obtaining a number and locations of the absent cuts, after the determining substep, based on the first and second DNA maps.
8. The process according to claim 3, wherein the validating step further
10 comprises the substeps of:
- i. determining whether the first DNA map includes one or more cuts which are missing from the second DNA map,
 - ii. after substep i, obtaining a first number and locations of the missing cuts based on the first and second DNA maps,
 - 15 iii. determining whether the second DNA map includes one or more cuts which are absent from the first DNA map, and
 - iv. after substep iii, obtaining a second number and locations of the absent cuts based on the first and second DNA maps.
- 20 9. The process according to claim 8, further comprising the step of:
- c) generating an error indication if at least one of:
 - i. the number of the matches is less than a match threshold,
 - ii. the first number of the missing cuts is greater than a first predetermined threshold, and
 - 25 iii. the second number of the absent cuts is greater than a second predetermined threshold.
10. The process according to claim 1, wherein the first DNA map is an in-silico ordered restriction map obtained from a DNA sequence.

-42-

11. The process according to claim 10, wherein the first DNA map includes identification data and at least one vector of the segments of the first DNA map.

12. The process according to claim 11, wherein the at least one vector of the first
5 segments encodes a size of base-pairs of the DNA sequence.

13. The process according to claim 12, wherein the second DNA map includes identification data and at least one variable-length vector representing its ordered segments.

10

14. The process according to claim 1, wherein the second DNA map is a subsequence of a genome-wide ordered restriction map of an optical DNA map.

15. The process according to claim 1, wherein the validation step comprises
15 determining the accuracy of at least one of the first DNA map and the second DNA map using the following probability density function:

$$\Pr(D | \hat{H}(\sigma, p_e, p_f))$$

where:

D is the second DNA map,

20 \hat{H} is the first DNA map,

σ is a standard deviation summarizing map-wide standard deviation data,

p_e is a probability of a positive cut of a DNA sequence, and

p_f is a probability of a false-positive cut of the DNA sequence.

25 16. The process according to claim 1, wherein the accuracy is validated as a function of an orientation of the first DNA map with respect to an orientation of the second DNA map.

17. The process according to claim 1, wherein the validation step comprises the
30 substeps of:

-43-

- i. executing a dynamic programming procedure ("DPP") on the first and second DNA maps to generate a first table of partial and complete alignment scores, and first auxiliary tables and first data structures to keep track of number and locations of cuts and segment matches,
 - 5 ii. receiving a third DNA map which is a reverse map of the first DNA map,
 - iii. executing the DPP on the second and third DNA maps to generate a second table of partial and complete alignment scores, and second auxiliary tables and second data structures to keep track of number and
10 locations of the cuts and the segment matches, and
 - iv. analyzing the last row of the first table and a last row of the second table to obtain at least one optimum alignment of the first and second DNA maps, and
 - v. reconstructing at least one of an optimum alignment and sub-optimal
15 alignments using the first and second auxiliary tables and data structures.
18. The process according to claim 1, wherein the accuracy is validated by matching an extension of a first left end segment of the segments of the first DNA
20 map to at least one of the segments of the second DNA map.
19. The process according to claim 1, wherein the accuracy is validated by matching an extension of a first right end segment of the segments of the first DNA
25 map to at least one of the segments of the second DNA map.
20. The process according to claim 1, further comprising the step of:
 - d) detecting an alignment of the first DNA map with respect to the second DNA map, the alignment being indicative of sequence positions of the segments of the first DNA map along the second DNA map.

21. A software system which, when executed on a processing device, configures the processing device to compare segments of a first DNA map with segments of a second DNA map to determine a level of accuracy of at least one or both of the first DNA map and the second DNA map, the software system comprising:
- 5 a processing subsystem which, when executed on the processing device, configures the processing device to perform the following steps:
- a) receives the first and second DNA maps, the first DNA map corresponding to a sequence DNA map, the second DNA map corresponding to a genomic consensus DNA map as provided in an
10 ordered restriction DNA map, and
 - b) validates the accuracy of at least one of the first DNA map and the second DNA map based on information associated with the first and second DNA maps.
- 15 22. The software system according to claim 21, wherein, when validating the accuracy, the processing subsystem determines whether one or more matches exists between at least one of the segments of the first DNA map and at least one of the segments of the second DNA map.
- 20 23. The software system according to claim 22, wherein, when validating the accuracy, the processing subsystem obtains a number of the matches which exist between the segments of the first DNA map and the segments of the second DNA map.
- 25 24. The software system according to claim 21, wherein, when validating the accuracy, the processing subsystem determines whether the first DNA map includes one or more cuts which are missing from the second DNA map.
- 30 25. The software system according to claim 4, wherein, when validating the accuracy, the processing subsystem obtains number and location of the missing cuts based on the first and second DNA maps.

-45-

26. The software system according to claim 21, wherein, when validating the accuracy, the processing subsystem determines whether the second DNA map includes one or more cuts which are absent from the first DNA map.
- 5 27. The software system according to claim 24, wherein, when validating the accuracy, the processing subsystem obtains number and location of the absent cuts based on the first and second DNA maps.
- 10 28. The software system according to claim 23, wherein, when validating the accuracy, the processing subsystem:
- i. determines whether the first DNA map includes one or more cuts which are missing from the second DNA map,
 - 15 ii. obtains number and location of the missing cuts based on the first and second DNA maps,
 - iii. determines whether the second DNA map includes one or cuts which are absent from the first DNA map, and
 - iv. obtains a second number of the absent cuts based on the first and second DNA maps.
- 20 29. The software system according to claim 28, wherein, when executed on the processing device, the processing subsystem further configures the processing device to generate an error indication if at least one of:
- i. the number of the matches is less than a match threshold,
 - 25 ii. the first number of the missing cuts is greater than a first predetermined threshold, and
 - iii. the second number of the absent cuts is greater than a second predetermined threshold.
- 30 30. The software system according to claim 21, wherein the first DNA map is an in-silico ordered restriction map obtained from a DNA sequence.

31. The software system according to claim 30, wherein the first DNA map includes identification data and a variable-length vector of the segments of the first DNA map.
- 5 32. The software system according to claim 31, wherein the vector of the segments of the first DNA map encodes a size of base-pairs of the DNA sequence.
33. The software system according to claim 32, wherein the second DNA map includes identification data and a variable-length vector of the segments of the second
10 DNA map.
34. The software system according to claim 21, wherein the second DNA map is a genome-wide ordered restriction map of an optical DNA map.
- 15 35. The software system according to claim 21, wherein, when validating the accuracy, the processing subsystem determines the accuracy of the at least one of the first DNA map and the second DNA map using the following probability density function:
- $$\Pr(D | \hat{H}(\sigma, p_c, p_f))$$
- 20 where:
- D is the second DNA map,
- \hat{H} is the first DNA map,
- σ is a standard deviation summarizing map-wide standard deviation data,
- p_c is a probability of a positive cut of a DNA sequence, and
- 25 p_f is a probability of a false-positive cut of the DNA sequence.
36. The software system according to claim 21, wherein the accuracy is validated as a function of an orientation of the first DNA map with respect to an orientation of the second DNA map.

-47-

37. The software system according to claim 21, wherein, when validating the accuracy, the processing subsystem:

- i. executes a dynamic programming procedure ("DPP") on the first and second DNA maps to generate a first table of partial and complete alignment scores, and first auxiliary tables and data structures to keep track of the number and locations of cuts and segment matches,
- ii. receives a third DNA map which is a reverse map of the first DNA map,
- iii. executes the DPP on the second and third DNA maps to generate a second table of partial and complete alignment scores, and second auxiliary tables and data structures to keep track of the number and locations of cuts and segment matches,
- iv. analyzes a last row of the first table and a last row of the second table to obtain at least one optimum alignment of the first and second DNA maps, and
- v. reconstructing at least one of an optimum alignment and sub-optimal alignments using the first and second auxiliary tables and data structures.

38. The software system according to claim 21, wherein the accuracy is validated by matching an extension of a first left end segment of the segments of the first DNA map to at least one of the segments of the second DNA map.

39. The software system according to claim 21, wherein the accuracy is validated by matching an extension of a first right end segment of the first DNA map to at least one of the segments of the second DNA map.

40. The software system according to claim 21, wherein, when executed on the processing device, the processing subsystem further configures the processing device to determine an alignment of the first DNA map with respect to the second DNA map,

-48-

the alignment being indicative of sequence positions of the first segments along the second DNA map.

41. A process for aligning a plurality of DNA sequences with a DNA map,
5 comprising the steps of:
- a) receiving the DNA sequences and the DNA map, the DNA sequences being fragments of a genome, the DNA map corresponding to a genomic consensus DNA map which relates to an ordered restriction DNA map;
 - b) validating a level of accuracy of at least one of the DNA sequences and the
10 DNA map based on information associated with the DNA sequences and the DNA map; and
 - c) determining locations of the DNA map at which the DNA sequences are capable of being associated with particular segments of the DNA map.
- 15 42. The process according to claim 41, wherein the locations are determined for each of the DNA sequences.
43. The process according to claim 41, wherein the locations are positions on the DNA map at which the corresponding DNA sequences are anchorable.
- 20 44. The process according to claim 41, wherein the locations define at least one alignment of the DNA sequences with respect to the DNA map.
45. The process according to claim 44, wherein the at least one alignment includes
25 multiple alignments of the DNA sequences with respect to the DNA map.
46. The process according to claim 45, further comprising the step of:
- d) ranking the multiple alignments based on a predetermined criteria to obtain a score set which includes a particular score for each of the multiple alignments.

-49-

47. The process according to claim 46, wherein the determining step comprises:
- i. providing the DNA sequences in a first order of the multiple alignments with respect to the DNA map, and
 - ii. determining a position for each of the DNA sequences, with respect to the DNA map, by selecting the DNA sequences to be in a second order corresponding to the score set.
- 5
48. The process according to claim 41, wherein the determining step comprises restricting each of the DNA sequences to be associated with only one of the locations on the DNA map.
- 10
49. The process according to claim 48, wherein the determining step produces a single alignment of the DNA sequences with respect to the DNA map.
- 15
50. The process according to claim 41, wherein the determining step includes:
- i. locating an optimal one of the locations for each of the DNA sequences to obtain an alignment solution, and
 - ii. repeating substep ii for each of the locations.
- 20
51. The process according to claim 50, wherein the locating substep is repeated for each subsequent one of the locations and excluding the alignment solution from a preceding locating substep.
- 25
52. The process according to claim 51, wherein each subsequent locating substep is performed by relaxing at least one particular constraint to determine the respective locations.
- 30
53. The process according to claim 52, wherein the at least one particular constraint includes a first requirement that two of the DNA sequences are prevented from overlapping when associated with the respective locations on the DNA map.

-50-

54. The process according to claim 52, wherein the particular constraint includes at least one of:

- i. a second requirement that a maximum number of the DNA sequences are associated with the respective locations on the DNA map, and
- 5 ii. a third requirement that an overall score of the alignment of the DNA sequences with respect to the locations on the DNA map is minimized or maximized.

55. The process according to claim 54, further comprising the step of:

- 10 e) assigning respective weighs to the second requirement and the third requirement.

56. The process according to claim 41, wherein the ordered restriction DNA map is an optical DNA map.

15

57. A software system which, when executed on a processing device, configures the processing device to align a plurality of DNA sequences with a DNA map, the software system comprising:

- a processing subsystem which, when executed on the processing device,
- 20 configures the processing device to perform the following steps:
 - a) receives the DNA sequences and the DNA map, the DNA sequences being fragments of a genome, the DNA map corresponding to a genomic consensus DNA map which relates to an ordered restriction DNA map,
 - 25 b) validates a level of accuracy of at least one of the DNA sequences and the DNA map based on information associated with the DNA sequences and the DNA map, and
 - c) determines locations of the DNA map at which the DNA sequences are capable of being associated with particular segments of the DNA map.

30

-51-

58. The software system according to claim 57, wherein the locations are determined for each of the DNA sequences.

59. The software system according to claim 57, wherein the locations are positions
5 on the DNA map at which the corresponding DNA sequences are anchorable.

60. The software system according to claim 57, wherein the locations define at least one alignment of the DNA sequences with respect to the DNA map.

10 61. The software system according to claim 60, wherein the at least one alignment includes multiple alignments of the DNA sequences with respect to the DNA map.

62. The software system according to claim 61, wherein the processing subsystem, when executed on the processing device, configures the processing device to rank the
15 multiple alignments based on a predetermined criteria to obtain a score set which includes a particular score for each of the multiple alignments.

63. The software system according to claim 62, wherein the processing device is configured by the processing subsystem to determine the locations of the DNA
20 sequences by:

- i. providing the DNA sequences in a first order of the multiple alignments with respect to the DNA map, and
- ii. determining a position for each of the DNA sequences, with respect to the DNA map, by selecting the DNA sequences to be in a second order
25 corresponding to the score set.

64. The software system according to claim 57, wherein the processing device is configured by the processing subsystem to determine the locations on the DNA sequences by restricting each of the DNA sequences to be associated with only one of
30 the locations of the DNA map.

-52-

65. The software system according to claim 64, wherein the processing device is configured by the processing subsystem to determine the locations of the DNA sequences for producing a single alignment of the DNA sequences with respect to the DNA map.

5

66. The software system according to claim 57, wherein the processing device is configured by the processing subsystem to determine the locations of the DNA sequences by:

- i. locating an optimal one of the locations for each of the DNA sequences to obtain an alignment solution, and
- ii. repeating substep ii for each of the locations.

10

67. The software system according to claim 66, wherein the locating of the optimal one of the locations is repeated for each subsequent one of the locations and the alignment solution is excluded from a preceding locating iteration.

15

68. The software system according to claim 67, wherein the processing subsystem configures the processing device to perform each subsequent locating iteration by relaxing at least one particular constraint to determine the respective locations.

20

69. The software system according to claim 68, wherein the at least one particular constraint includes a first requirement that two of the DNA sequences are prevented from overlapping when associated with the respective locations on the DNA map.

70. The software system according to claim 68, wherein the particular constraint includes at least one of:

25

- i. a second requirement that a maximum number of the DNA sequences are associated with the respective locations on the DNA map, and
- ii. a third requirement that an overall score of the alignment of the DNA sequences with respect to the locations on the DNA map is minimized or maximized.

30

-53-

71. The software system according to claim 70, wherein the processing subsystem, when executed on the processing device, configures the processing device to assign respective weights to the second requirement and the third requirement.

5

72. The software system according to claim 70, wherein the ordered restriction DNA map is an optical DNA map.

73. A process for aligning a plurality of DNA sequences with a DNA map,
10 comprising the steps of:

- a) receiving the DNA sequences and the DNA map, the DNA sequences being fragments of a genome, the DNA map corresponding to a genomic consensus DNA map which relates to an ordered restriction DNA map; and
- b) determining locations of the DNA map at which the DNA sequences are
15 capable of being associated with particular segments of the DNA map, the locations of the DNA sequences being determined by:
 - i. locating an optimal one of the locations for each of the DNA sequences, and
 - ii. repeating substep i for each of the locations.

20

74. A software system which, when executed on a processing device, configures the processing device to align a plurality of DNA sequences with a DNA map, the software system comprising:

a processing subsystem which, when executed on the processing device,
25 configures the processing device to perform the following steps:

- a) receives the DNA sequences and the DNA map, the DNA sequences being fragments of a genome, the DNA map corresponding to a genomic consensus DNA map which relates to an ordered restriction DNA map, and

-54-

- 5 b) determines locations of the DNA map at which the DNA sequences are capable of being associated with particular segments of the DNA map by:
- i. locating an optimal one of the locations for each of the DNA sequences, and
 - ii. repeating the locating of the optimal one of the locations for each of the locations.

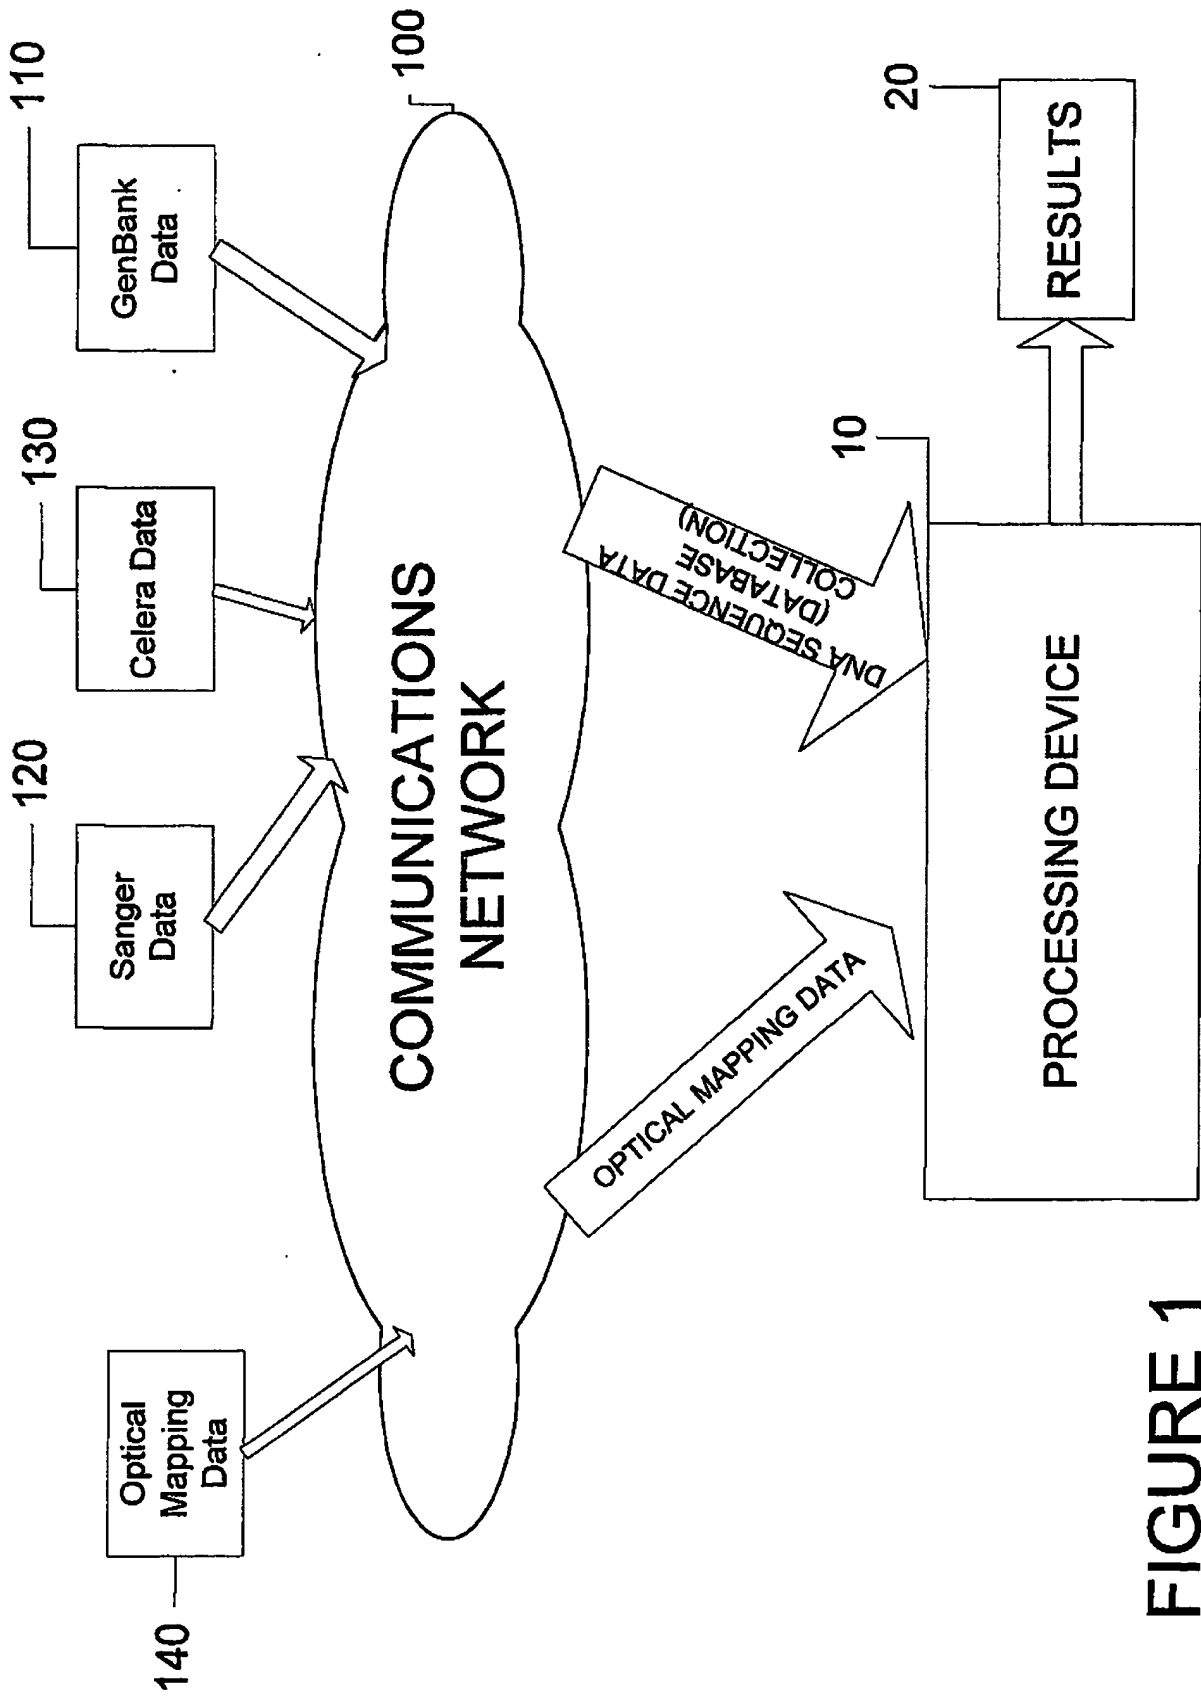


FIGURE 1

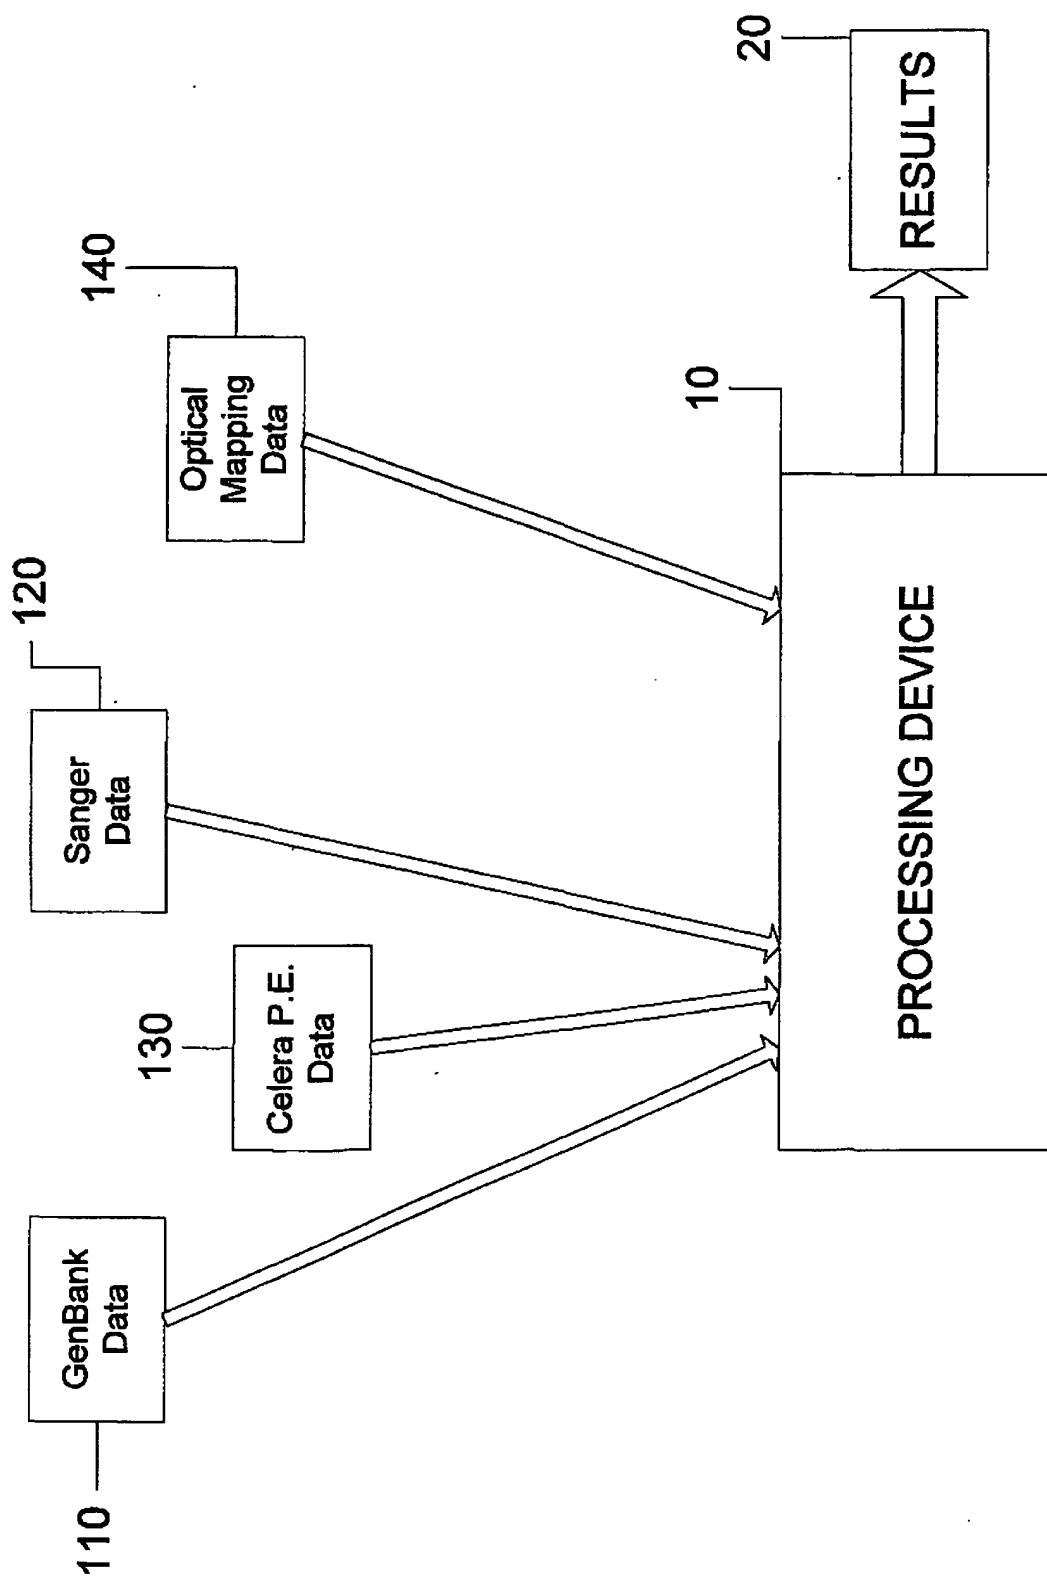


FIGURE 2

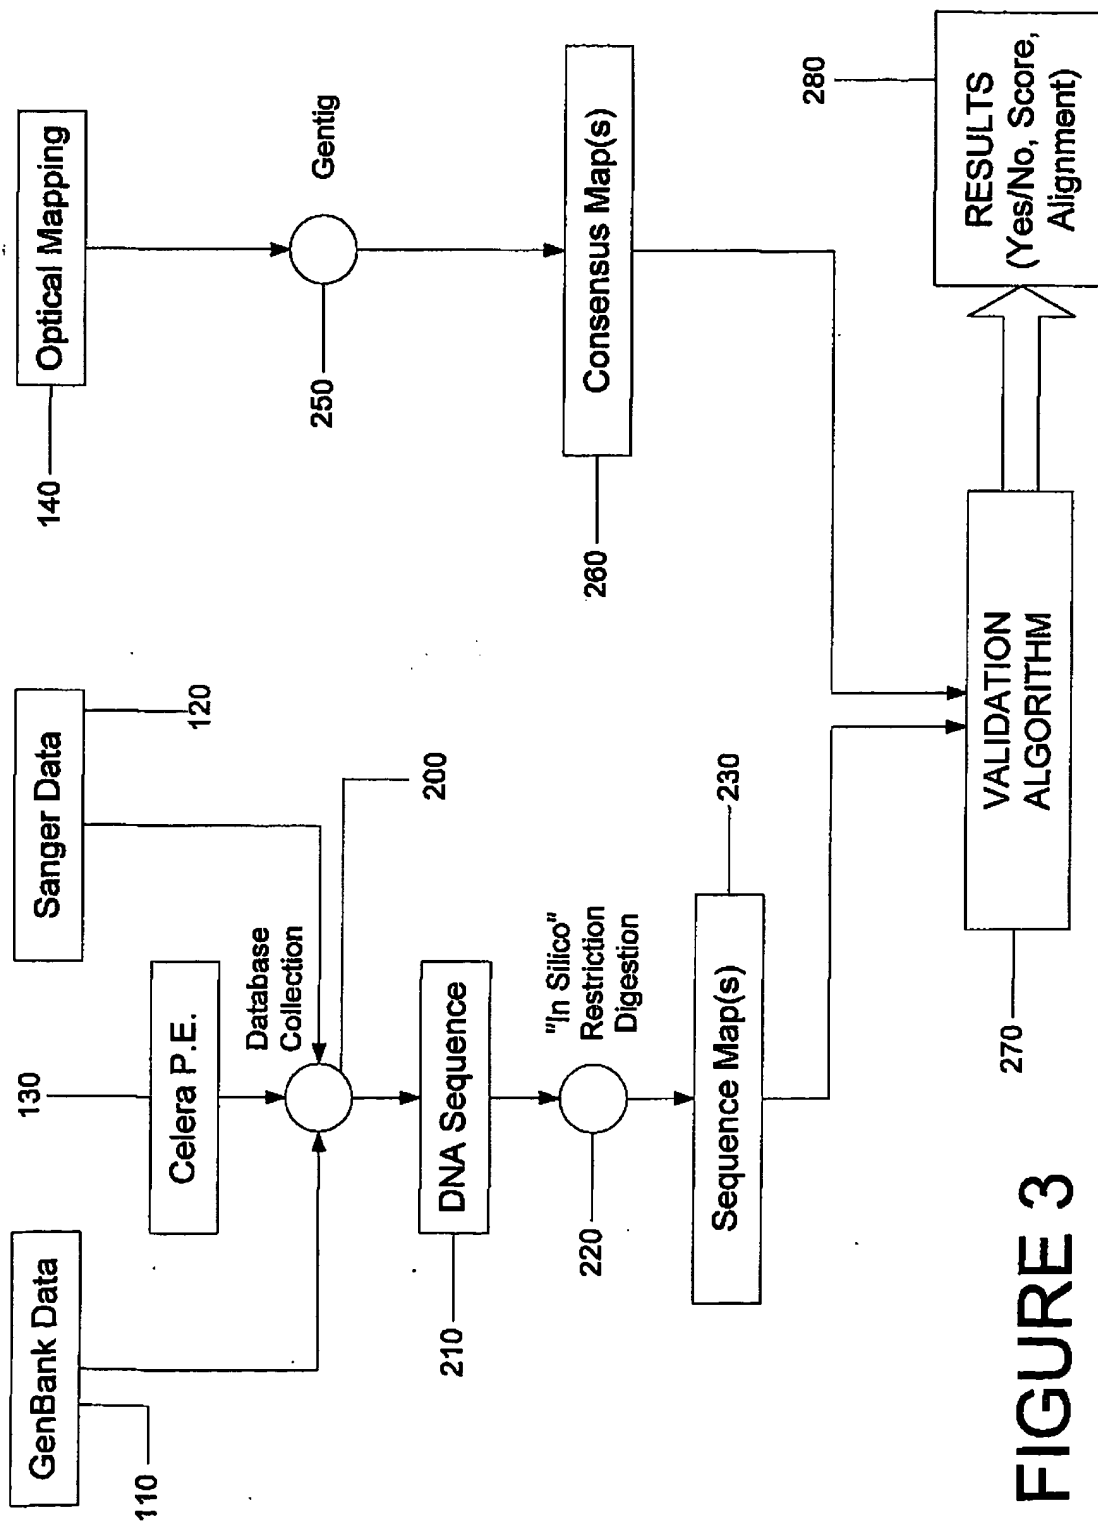


FIGURE 3

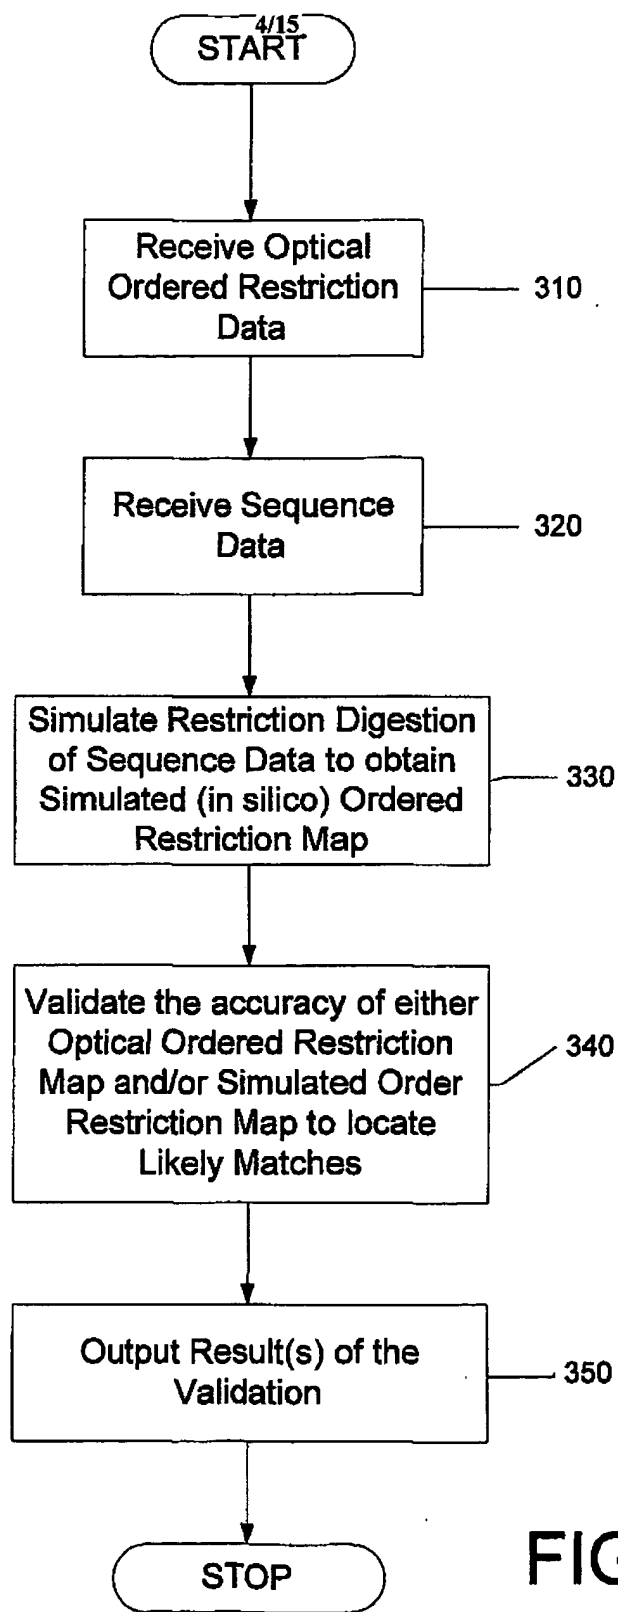


FIGURE 4

5/15

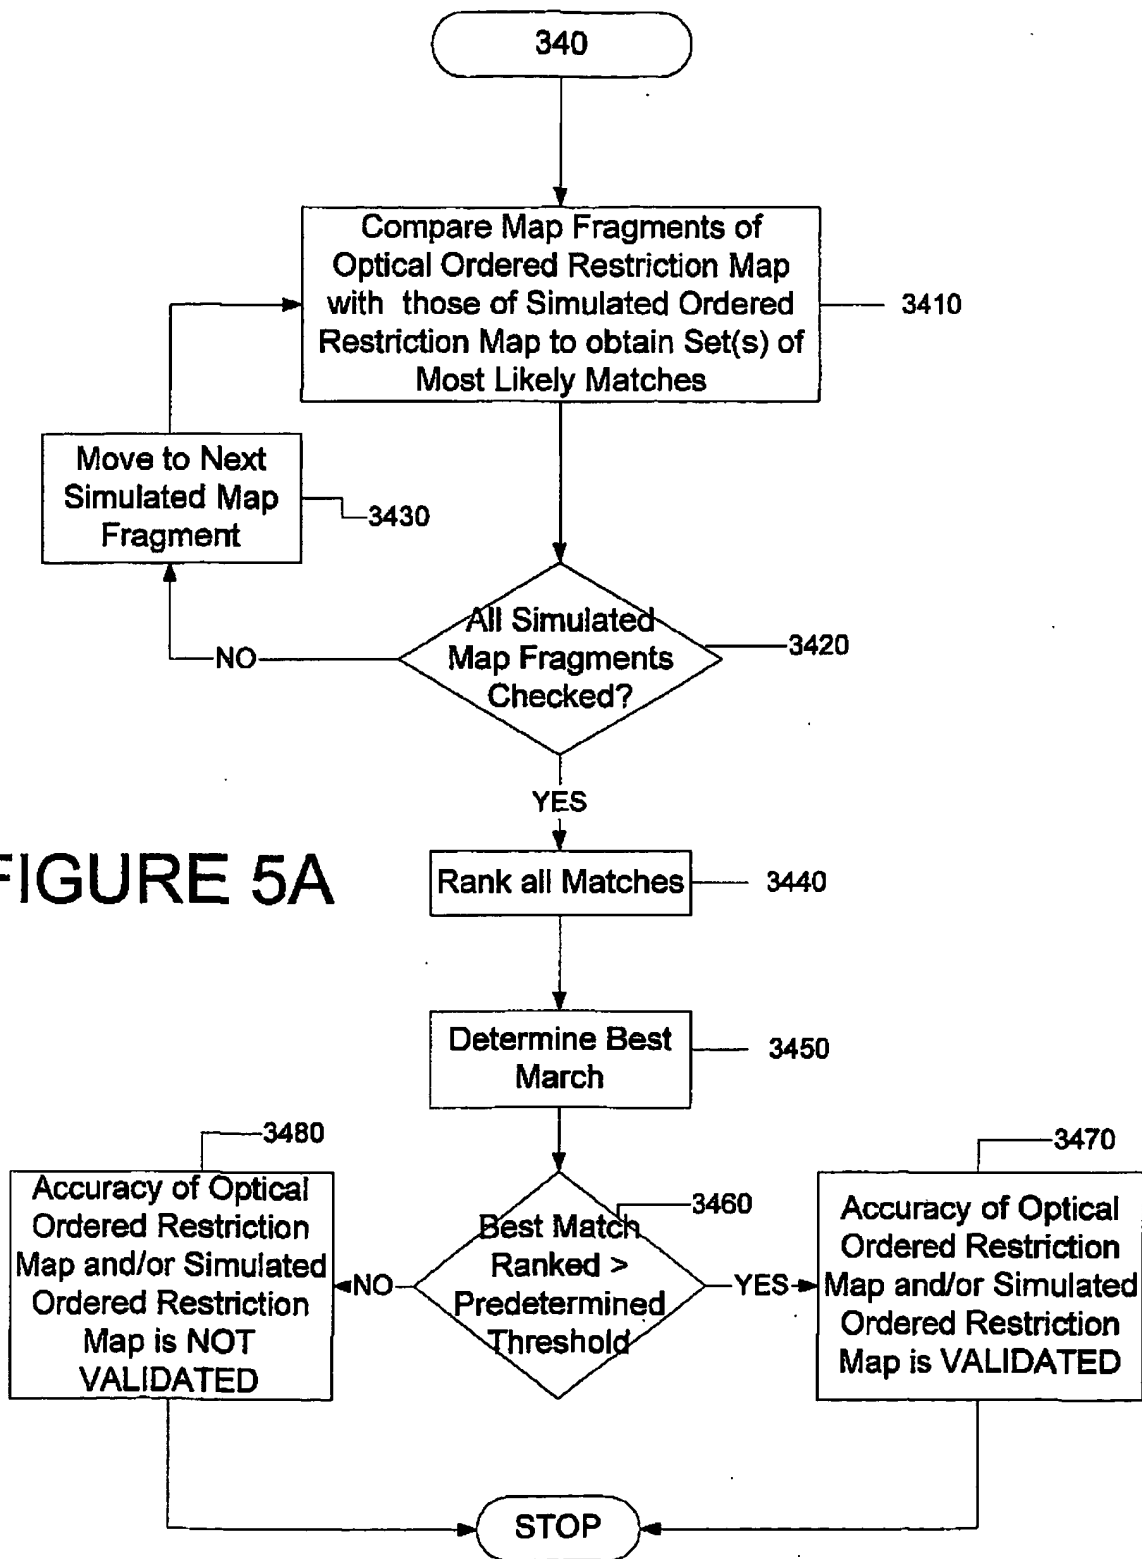


FIGURE 5A

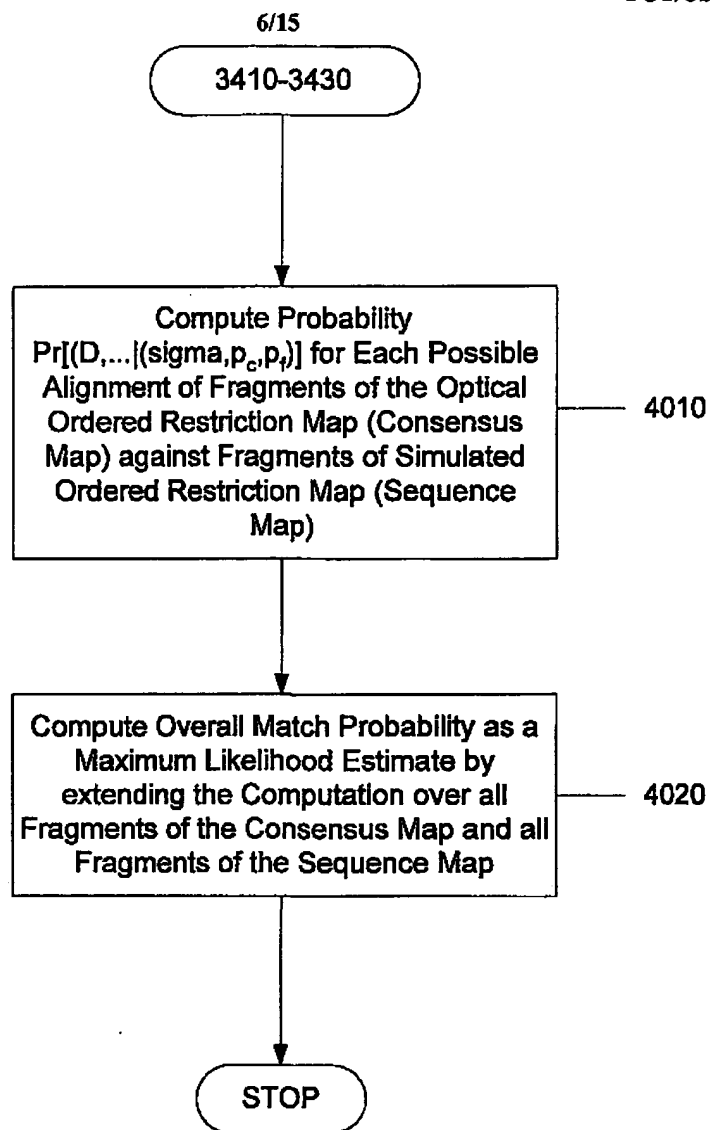
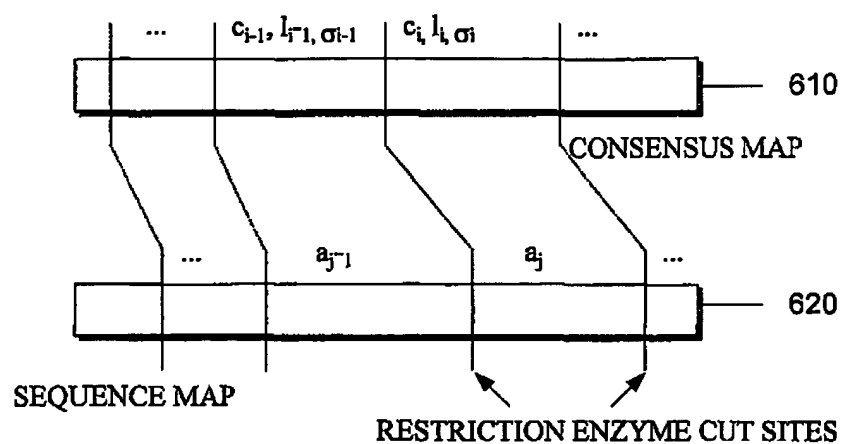
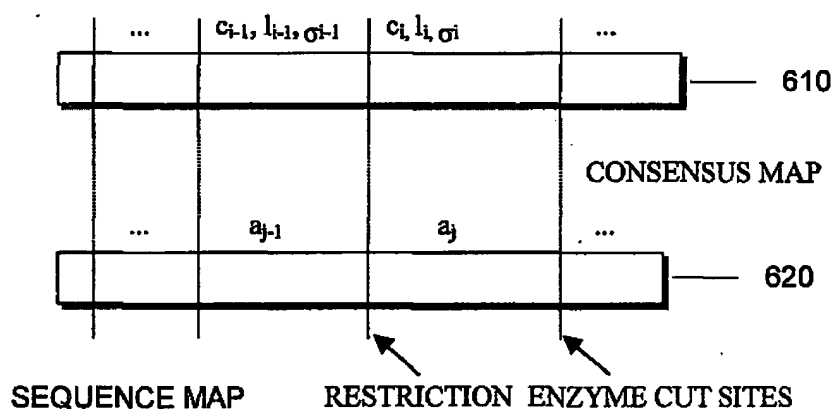


FIGURE 5B

**FIGURE 6A****FIGURE 6B**

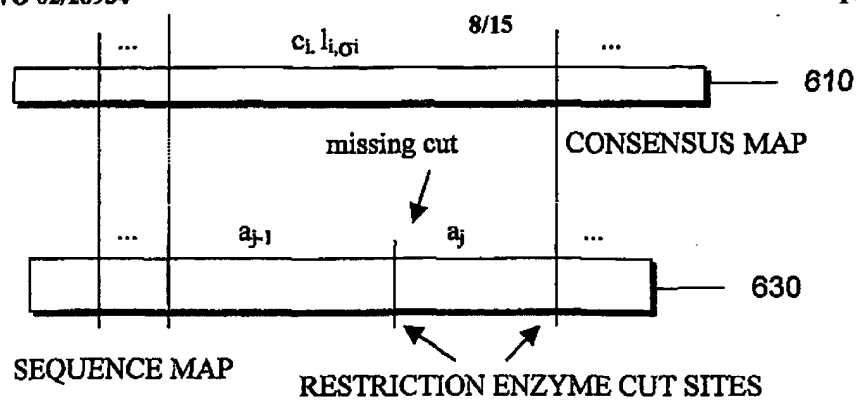


FIGURE 6C

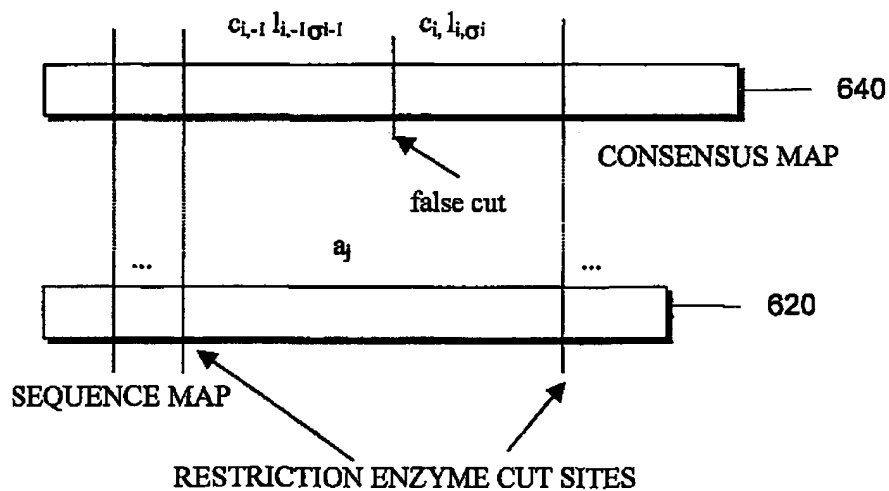
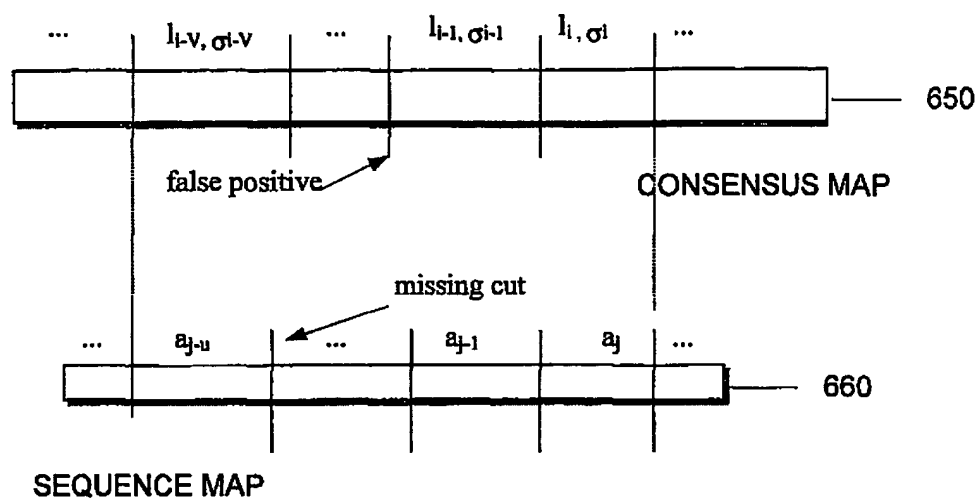
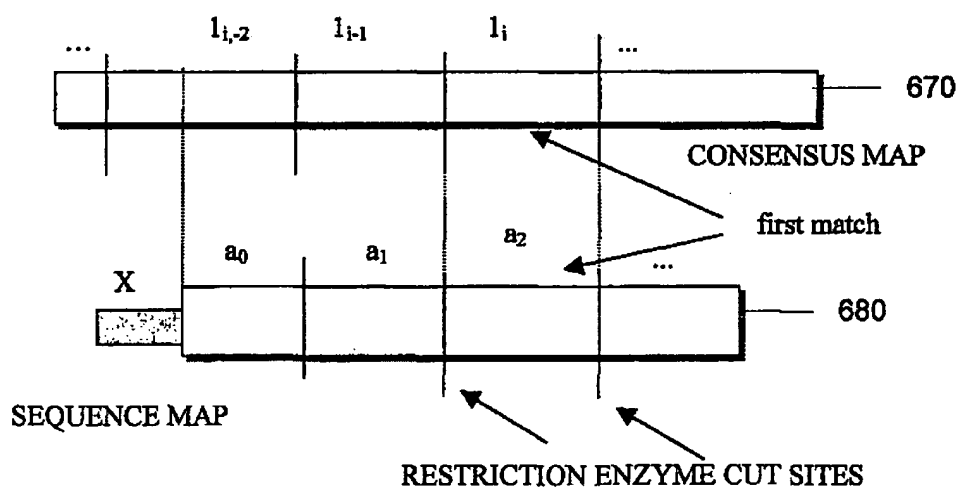


FIGURE 6D

**FIGURE 6E****FIGURE 6F**

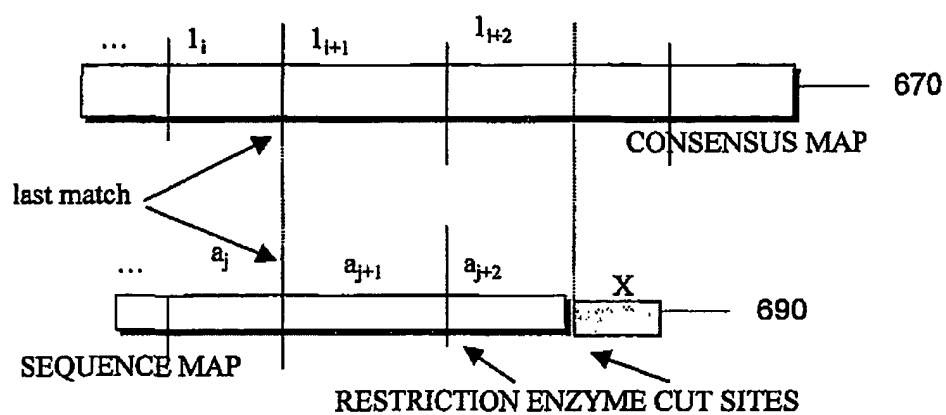


FIGURE 6G

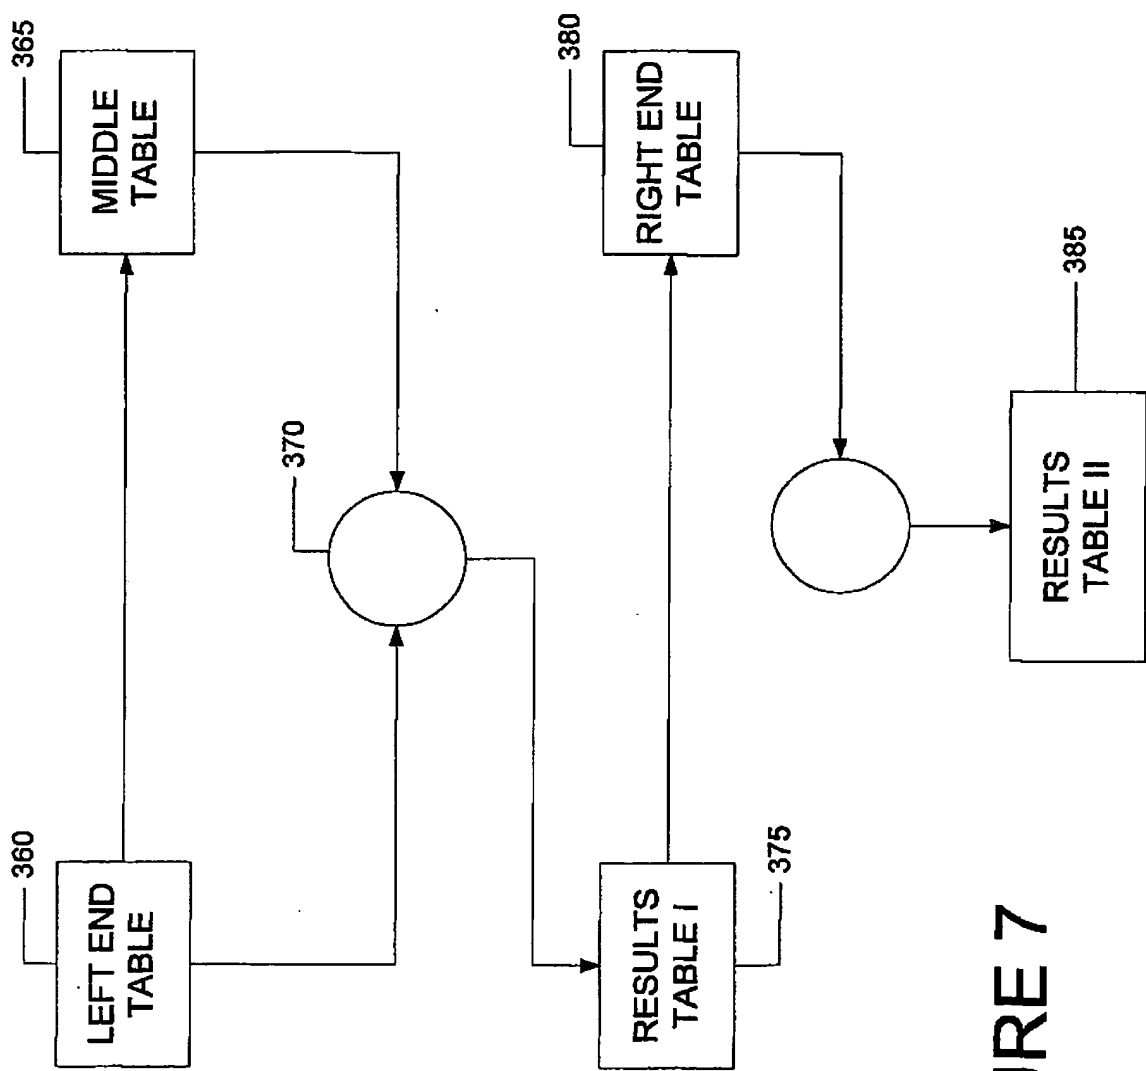


FIGURE 7

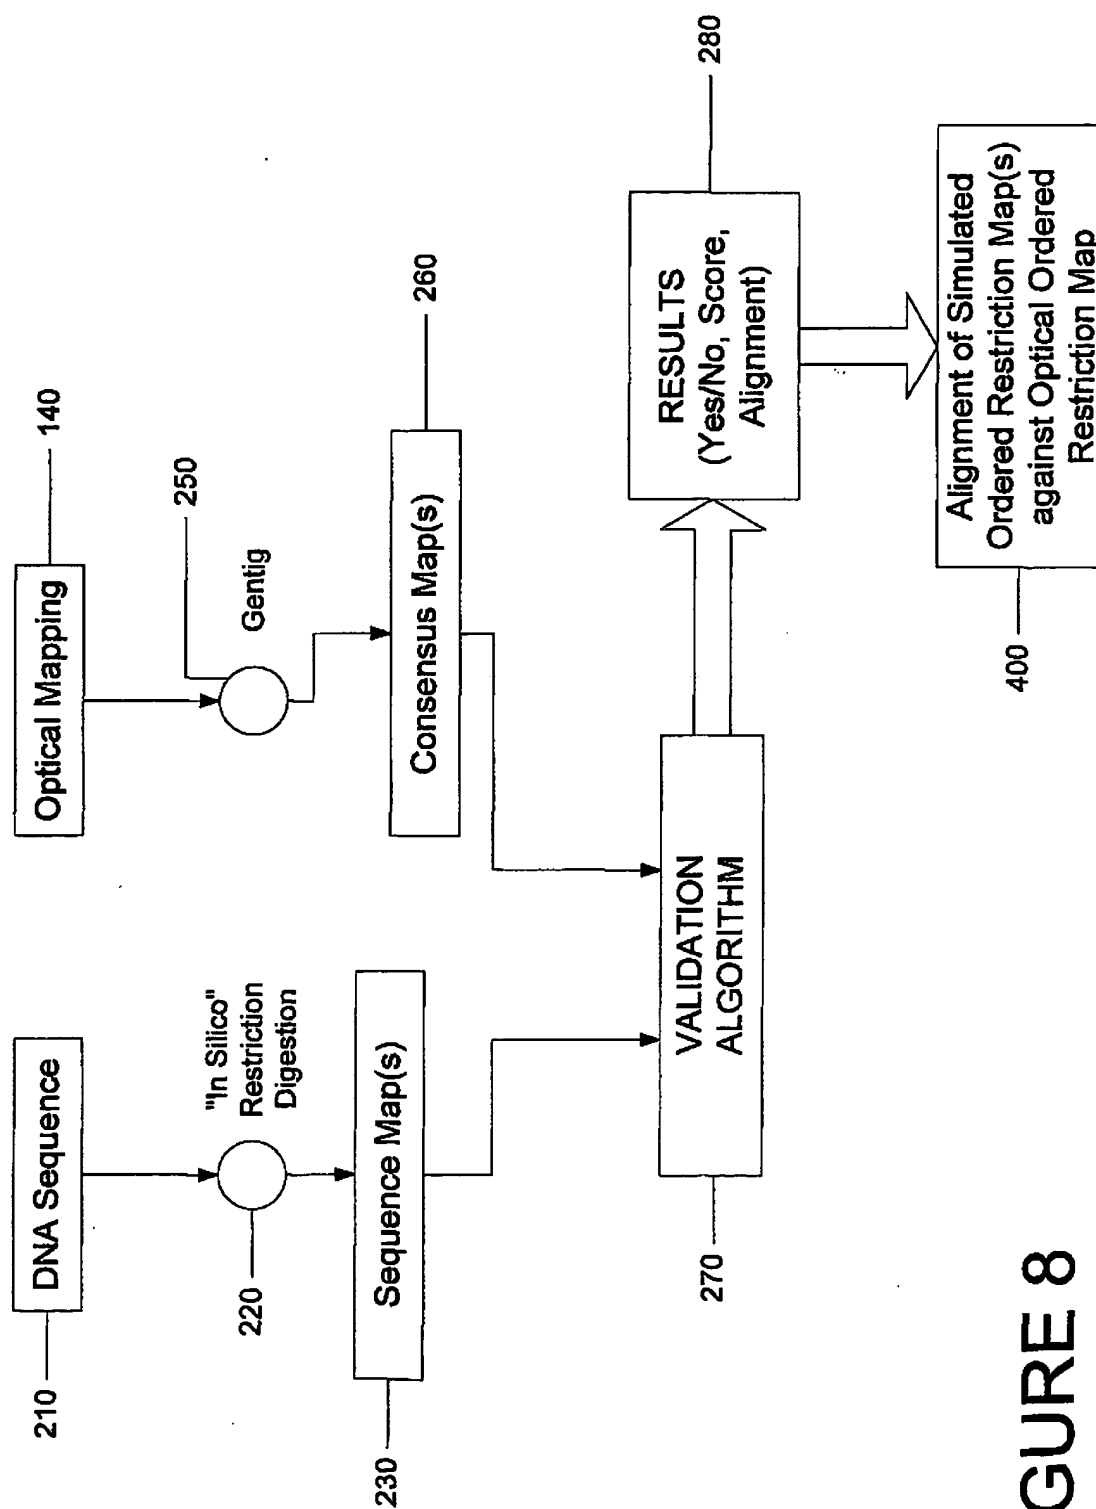


FIGURE 8


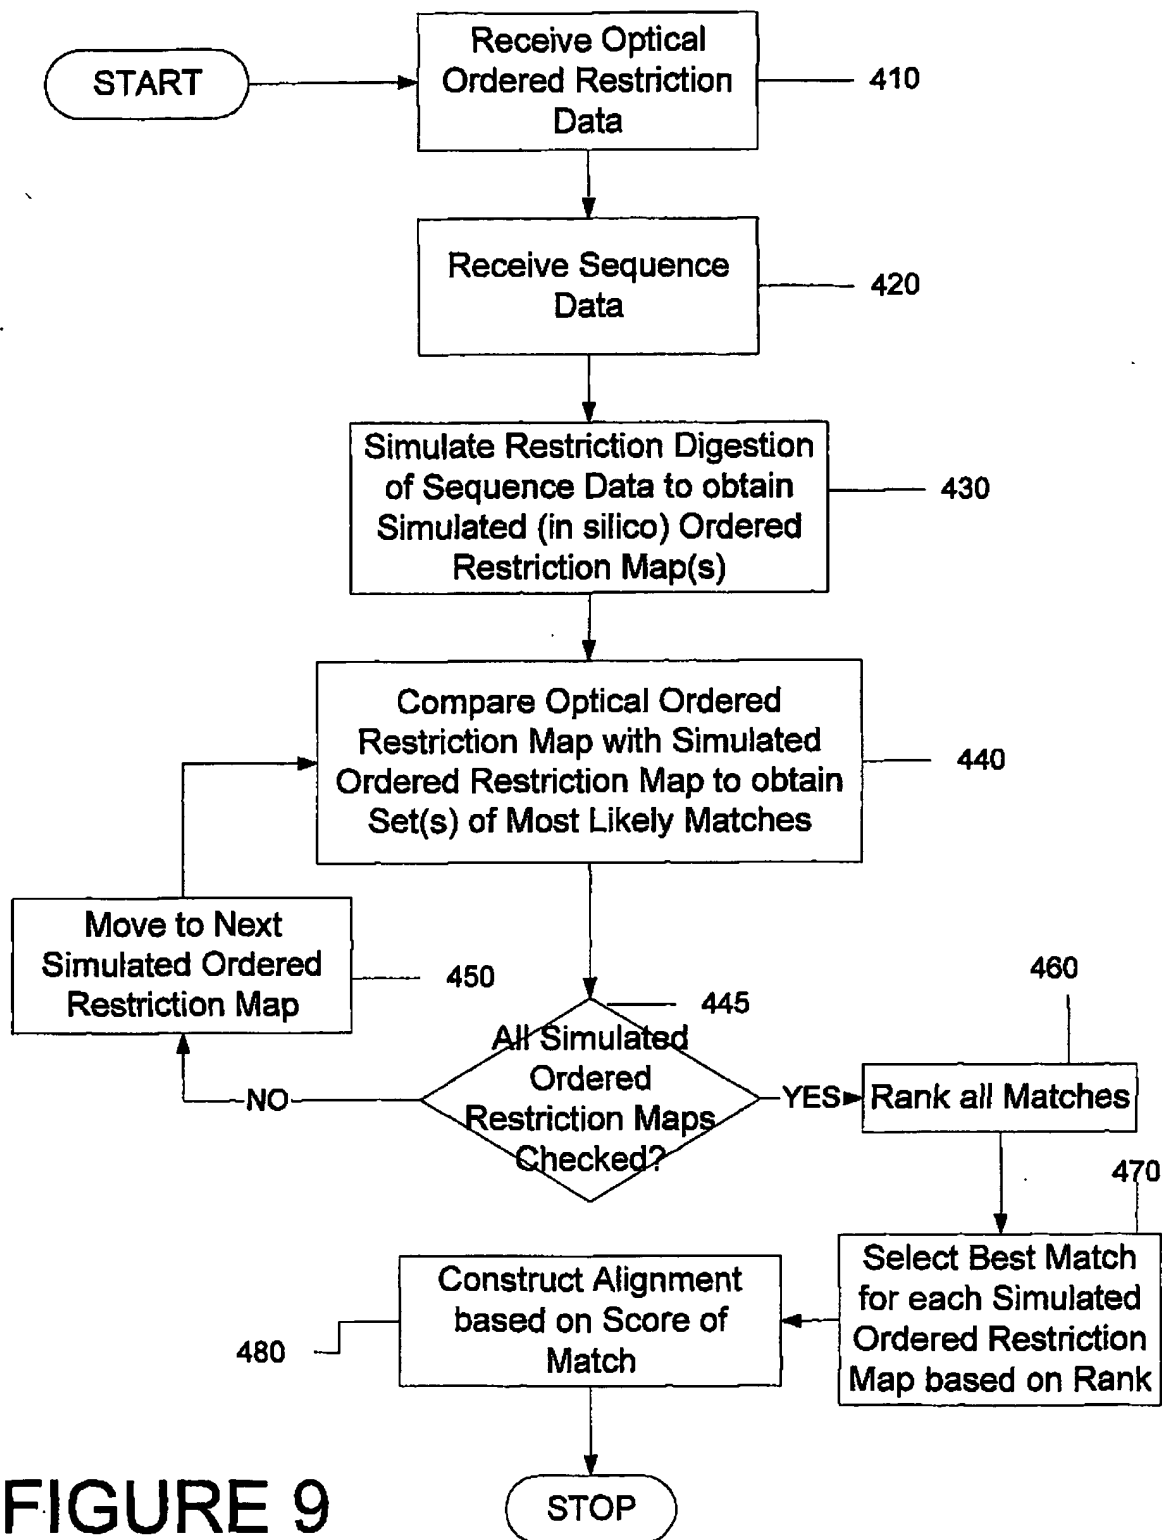


FIGURE 10

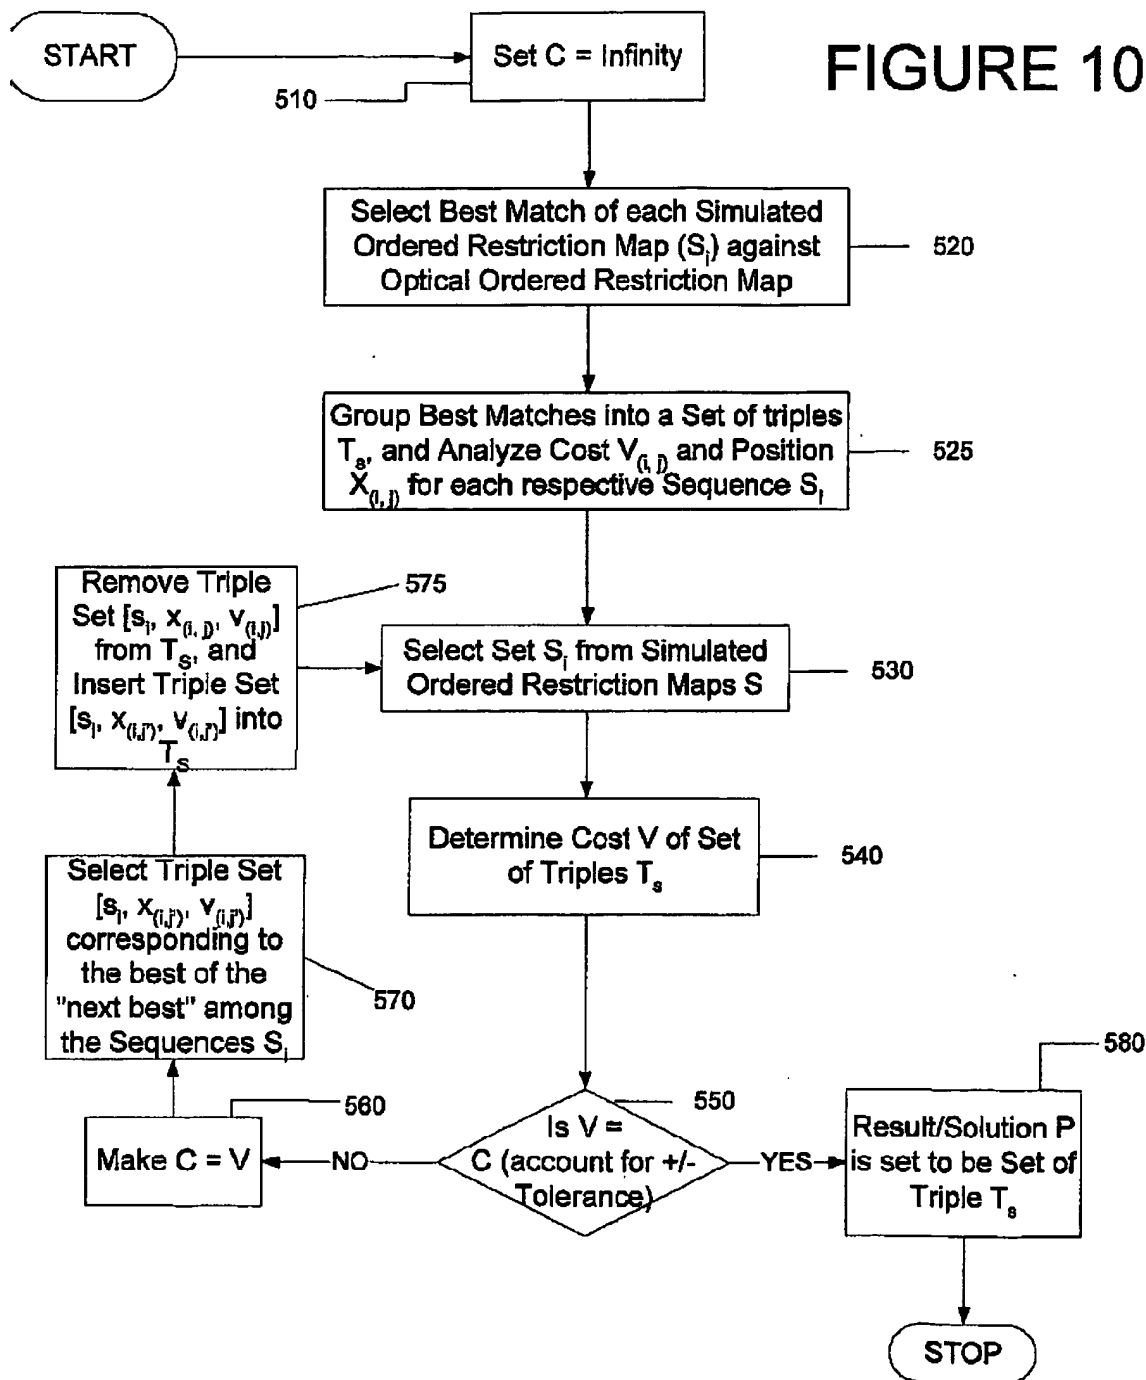

File View Help									
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70
71	72	73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100
101	102	103	104	105	106	107	108	109	110
111	112	113	114	115	116	117	118	119	120
121	122	123	124	125	126	127	128	129	130
131	132	133	134	135	136	137	138	139	140
141	142	143	144	145	146	147	148	149	150
151	152	153	154	155	156	157	158	159	160
161	162	163	164	165	166	167	168	169	170
171	172	173	174	175	176	177	178	179	180
181	182	183	184	185	186	187	188	189	190
191	192	193	194	195	196	197	198	199	200
201	202	203	204	205	206	207	208	209	210
211	212	213	214	215	216	217	218	219	220
221	222	223	224	225	226	227	228	229	230
231	232	233	234	235	236	237	238	239	240
241	242	243	244	245	246	247	248	249	250
251	252	253	254	255	256	257	258	259	260
261	262	263	264	265	266	267	268	269	270
271	272	273	274	275	276	277	278	279	280
281	282	283	284	285	286	287	288	289	290
291	292	293	294	295	296	297	298	299	300
301	302	303	304	305	306	307	308	309	310
311	312	313	314	315	316	317	318	319	320
321	322	323	324	325	326	327	328	329	330
331	332	333	334	335	336	337	338	339	340
341	342	343	344	345	346	347	348	349	350
351	352	353	354	355	356	357	358	359	360
361	362	363	364	365	366	367	368	369	370
371	372	373	374	375	376	377	378	379	380
381	382	383	384	385	386	387	388	389	390
391	392	393	394	395	396	397	398	399	400
401	402	403	404	405	406	407	408	409	410
411	412	413	414	415	416	417	418	419	420
421	422	423	424	425	426	427	428	429	430
431	432	433	434	435	436	437	438	439	440
441	442	443	444	445	446	447	448	449	450
451	452	453	454	455	456	457	458	459	460
461	462	463	464	465	466	467	468	469	470
471	472	473	474	475	476	477	478	479	480
481	482	483	484	485	486	487	488	489	490
491	492	493	494	495	496	497	498	499	500
501	502	503	504	505	506	507	508	509	510
511	512	513	514	515	516	517	518	519	520
521	522	523	524	525	526	527	528	529	530
531	532	533	534	535	536	537	538	539	540
541	542	543	544	545	546	547	548	549	550
551	552	553	554	555	556	557	558	559	560
561	562	563	564	565	566	567	568	569	570
571	572	573	574	575	576	577	578	579	580
581	582	583	584	585	586	587	588	589	590
591	592	593	594	595	596	597	598	599	600
601	602	603	604	605	606	607	608	609	610
611	612	613	614	615	616	617	618	619	620
621	622	623	624	625	626	627	628	629	630
631	632	633	634	635	636	637	638	639	640
641	642	643	644	645	646	647	648	649	650
651	652	653	654	655	656	657	658	659	660
661	662	663	664	665	666	667	668	669	670
671	672	673	674	675	676	677	678	679	680
681	682	683	684	685	686	687	688	689	690
691	692	693	694	695	696	697	698	699	700
701	702	703	704	705	706	707	708	709	710
711	712	713	714	715	716	717	718	719	720
721	722	723	724	725	726	727	728	729	730
731	732	733	734	735	736	737	738	739	740
741	742	743	744	745	746	747	748	749	750
751	752	753	754	755	756	757	758	759	760
761	762	763	764	765	766	767	768	769	770
771	772	773	774	775	776	777	778	779	780
781	782	783	784	785	786	787	788	789	790
791	792	793	794	795	796	797	798	799	800
801	802	803	804	805	806	807	808	809	810
811	812	813	814	815	816	817	818	819	820
821	822	823	824	825	826	827	828	829	830
831	832	833	834	835	836	837	838	839	840
841	842	843	844	845	846	847	848	849	850
851	852	853	854	855	856	857	858	859	860
861	862	863	864	865	866	867	868	869	870
871	872	873	874	875	876	877	878	879	880
881	882	883	884	885	886	887	888	889	890
891	892	893	894	895	896	897	898	899	900
901	902	903	904	905	906	907	908	909	910
911	912	913	914	915	916	917	918	919	920
921	922	923	924	925	926	927	928	929	930
931	932	933	934	935	936	937	938	939	940
941	942	943	944	945	946	947	948	949	950
951	952	953	954	955	956	957	958	959	960
961	962	963	964	965	966	967	968	969	970
971	972	973	974	975	976	977	978	979	980
981	982	983	984	985	986	987	988	989	990
991	992	993	994	995	996	997	998	999	1000

Figure 11

This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**